
15-015-00505-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

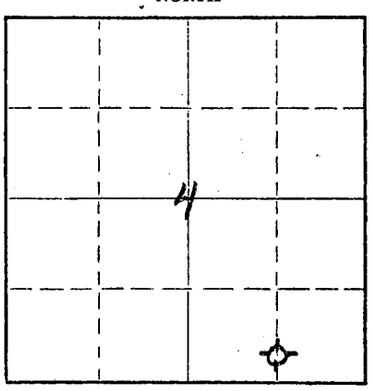

Locate well correctly on above Section Plat

Butler County. Sec. 4 Twp. 28S Rge. 3 (E) (W)

Location as "NE/CNW¼SW¼" or footage from lines Cen. S/2 S/2 SE/4

Lease Owner John P. Gaty

Lease Name Davenport Well No. 1

Office Address 4601 East Douglas, Room 204, Wichita 18, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed June 2 19 61

Application for plugging filed June 2 19 61

Application for plugging approved June 7 19 61

Plugging commenced June 7 19 61

Plugging completed June 9 19 61

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Lee Guthrie

Producing formation Depth to top Bottom Total Depth of Well 3147 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS — CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Gravel and Sand from 3147' to 3080'
Five sacks cement at 3080'
Mud to 180'
20' Rock bridge with 15 sacks cement @ 180'
Mud to 35'
Rock bridge with 10 sacks cement to surface

RECEIVED
STATE CORPORATION COMMISSION
6/20/61
JUN 20 1961
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor John P. Gaty

Address 4601 East Douglas, Room 204, Wichita 18, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.

Earl Wentworth (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Earl Wentworth

734 Pippin Court, Wichita, Ks
(Address)

SUBSCRIBED AND SWORN TO before me this 19th day of June, 1961

J. Arnold Howard
Notary Public.

My commission expires December 12, 1963

INVOICED
DATE 6-30-61
INV. NO. 3827-E

5-44N

15-015-00505-00-00

HAROLD MARTIN DRILLING COMPANY, INC.
ARKANSAS CITY, KANSAS
BOX 756

Davenport #1
Center of S½ of S½ of SE¼
Sec: 4-28S-3E
Butler County, Kansas
OPERATOR: JOHN P. GATY

Well commenced May 15, 1961
5½" casing cemented on bottom,
May 22, 1961.

FORMATION LOG

	Ft.	Ft.
Soil, Clay & Lime	0	20
Lime & Shale	20	94
Lime	94	480
Lime & Shale	480	740
Shale & Shells	740	880
Shale	880	960
Lime & Shale	960	1290
Shale & Shells	1290	1590
Lime & Shale	1590	2020
Shale & Shells	2020	2269
Shale	2269	2356
Lime	2356	2705
Lime & Shale	2705	2825
Shale & Shells	2825	2867
Lime "Cherty"	2867	2890
Mississippi Lime	2890	3026
Shale	3026	3096
Simpson Sand	3096	3098
Total Depth	3098	

RECEIVED
STATE CORPORATION COMMISSION
MAY 25 1961
CONSERVATION DIVISION
Wichita, Kansas

This is a true and exact copy of the formation, taken from The Daily Drilling Reports.

Harold Martin Drilling Company, Inc.

Harold U. Martin President

Sworn to before me this 24th day of May, 1961.

My Commission expires October 13, 1962.

Dorothy Ellen Martin
Public Notary

NOTARY PUBLIC
BUTLER COUNTY, KANSAS