


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

NORTH

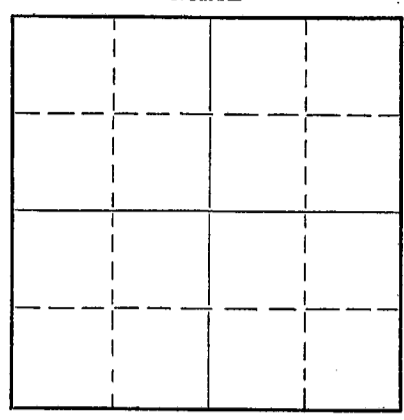

Locate well correctly on above
Section Plat

Butler County, Sec. 9 Twp. 28 Rge. 3 (E) ~~XXXXXX~~
 Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SW SW SE
 Lease Owner Rex & Morris Ainsworth, Etal
 Lease Name Reschke Well No. 1
 Office Address 919-20 Union National Bank Building Wichita, Kansas
 Character of Well (completed as Oil, Gas or Dry Hole) dry hole
 Date well completed July 8 1951
 Application for plugging filed " 8 1951
 Application for plugging approved " 8 1951
 Plugging commenced 8 8 1951
 Plugging completed " 8 1951
 Reason for abandonment of well or producing formation _____
 If a producing well is abandoned, date of last production _____ 19____
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well A. L. Leman
 Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3155 Feet
 Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8-5/8" SP	164' 6"	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Laid down drill pipe. Bridged hole at 130'; 10 sacks cement on 10' rock bridge at 120'; mud to 15'; 5 sacks cement on 5' rock bridge



(If additional description is necessary, use BACK of this sheet)
 Correspondence regarding this well should be addressed to Rex & Morris Drilling Company
 Address P. O. Box 334, El Dorado, Kansas

STATE OF KANSAS, COUNTY OF BUTLER, ss.
C. E. McClure (employee of contractor or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. E. McClure

El Dorado, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 23rd day of July, 1951



Marvin J. Chestnut
Notary Public.

PLUGGING
 FILE SEC 9-T-88-R-36
 BOOK PAGE 96 LINE 14

WELL NO. 1
 Section 9-23-35
 Butler County, Kansas

Initial Production: Dry & Abandoned
 Drilled for: Ainsworth, et al
 Drilled by: Rex & Morris Drilling Co.
 Drilling Commenced: 6-29-51
 Drilling Completed: 7-8-51

Casing Record:

164'6" 8-5/8" Surface Pipe cemented w/90 wt.

FORMATION	DEPTH
Line & shale	790
Shale & shells	1160
Line & shale	1780
Line	2018
Line & shale	2390
Line K.O.	2406
Line & shale	2864
Shale	2904
Cherty Mississippi	2918
Line	5078
Shale	3149
Suspect sand	3152
Shale	3304
Rotary Total Depth	3304'

We hereby certify the above and foregoing log to be a true and correct copy of the Reschke Well #1, located in the SE SW SW, Section 9-23-35, Butler County, Kansas.

REX & MORRIS DRILLING COMPANY

BY C. E. McClure

Witness and subscribed before me this 23rd day of July, 1951.

My commission expires June 27, 1953. Morris J. Chestnut
 Notary Public

PLUGGING
 FILE SEC 9-T-R-3E
 BOOK PAGE 46 LINE 14

RECORDED
 JUL 24 1951
 DIVISION
 Wichita, Kansas