


15-065-00286-00-00

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Graham County, Sec. 27 Twp. 10 Rge. 21 (E) W (W)
SE NW NW

Location as "NE/CNW/SW" or footage from lines.
Lease Owner Jones, Shelburne & Farmer, Inc.
Lease Name Noah #1 Well No.
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 5-13-58 _____ 19____
Plugging completed 5-15-58 _____ 19____
Reason for abandonment of well or producing formation _____

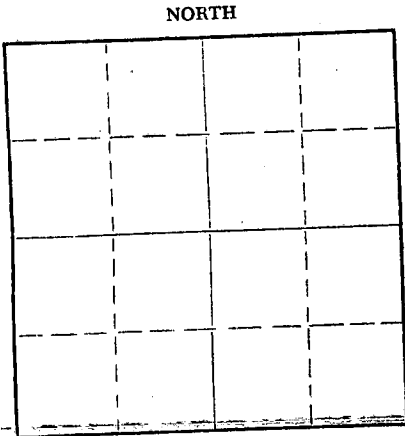

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? yes

Name of Conservation Agent who supervised plugging of this well Mr. Fabricius
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3832' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|--------|--------|------------|
| | | | | 8-5/8" | 144' | none |
| | | | | 5-1/2" | 3807' | 648' |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked the hole to 3830' and found it open.
Filled w/sand to 3800' and ran 4 sacks of cement.
Pulled 5 1/2" casing. Checked fluid to 50', bailed
the hole to 140', set a rock bridge to 135' and
dumped 25 sacks of cement. Mudded the hole to 35',
set a rock bridge to 30' and ran 10 sacks of
cement to base of cellar.


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor West Supply Co., Inc.
Address Chase, Kansas

STATE OF KANSAS, COUNTY OF RICE, ss.
_____, (employee of owner) or (owner or operator) of the above-described
well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the
above-described well as filed and that the same are true and correct. So help me God.

(Signature) Thelma Knight
Chase, Ky (Address)

SUBSCRIBED AND SWORN to before me this 20th day of May, 19 58

Thomas V. Duggan
Notary Public.



STATE CORPORATION COMMISSION
MAY 27 1958
05-23-1958
Wichita, Kansas

PLUGGING
FILE SEC. 27 T. 10 R. 21W
BOOK PAGE 104 LINE 24