

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-145-21571-00-00
Spot: NWSENE Sec/Twnshp/Rge: 26-20S-19W
1550 feet from N Section Line, 950 feet from E Section Line
Lease Name: EDWARDS TRUST Well #: 8-26
County: PAWNEE Total Vertical Depth: 4500 feet

Operator License No.: 33069
Op Name: ENCORE OPERATING COMPANY
Address: PO BOX 27710
DENVER, CO 80227

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	498		WITH 325 SX CMT

146.25

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 03/31/2008 3:00 PM
Plug Co. License No.: 5929 Plug Co. Name: DUKE DRILLING CO., INC.
Proposal Rcvd. from: STEVE STEPHENS Company: DUKE DRILLING CO., INC. Phone: (316) 267-1331

Proposed Plugging Method: 1ST PLUG AT 4407' WITH 50 SX CMT. 2ND PLUG AT 1360' WITH 50 SX CMT. 3RD PLUG AT 520' WITH 50 SX CMT. 4TH PLUG AT 240' WITH 40 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: MICHAEL MAIER Witness Type: NONE
Date/Time Plugging Completed: 03/31/2008 5:00 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

1ST PLUG AT 4407' WITH 50 SX CMT. 2ND PLUG AT 1360' WITH 50 SX CMT. 3RD PLUG AT 520' WITH 50 SX CMT. 4TH PLUG AT 240' WITH 40 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Perfs:


INVOICED
DATE 4-22-08
INV. NO. 2008061573

RECEIVED
KANSAS CORPORATION COMMISSION
APR 11 2008
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

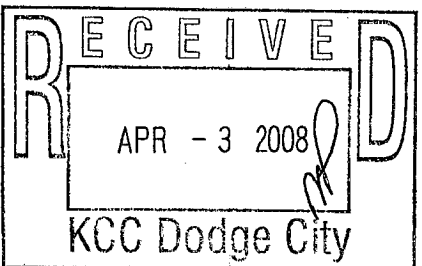

Signed Michael Maier
(TECHNICIAN)

Form CP-28

PKT