

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-129-10334-00-01
Spot: NWNW Sec/Twnshp/Rge: 33-34S-41W
660 feet from N Section Line, 660 feet from W Section Line
Lease Name: WILBURTON MORROW SAND Well #: 1102W
County: MORTON Total Vertical Depth: 5210 feet

Operator License No.: 5447
Op Name: OXY USA INC.
Address: 5 E GREENWAY PLZ PO BOX 27570
HOUSTON, TX 77227

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		4590		WITH 2 SX CMT
PROD	4.5	5054	0	WITH 250 SX CMT
SURF	8.625	1439		WITH 700 SX CMT

169.33

Well Type: EOR UIC Docket No: _____ Date/Time to Plug: 03/20/2008 9:00 AM
Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.
Proposal Rcvd. from: DON HORTON Company: SARGENT AND HORTON PLUGGIN Phone: (580) 854-6515

Proposed Plugging Method: TEST CSG 1500-0'. CIBP @ 4725' WITH 2 SX CMT. PLUG AT 1470' WITH 50 SX CMT. PLUG AT 600' WITH 40 SX CMT. PLUG AT 300' WITH 40 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: KEN JEHLIK Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 03/24/2008 4:00 PM KCC Agent: JACK MACLASKEY

Actual Plugging Report:
TESTED 4 1/2" WITH 2 3/8" TBG & 4 1/2" PACKER AT 1500'. PRESSURED CASING TO 500# & HELD. SET CIBP @ 4590' WITH 2 SX CMT. RAN BOND LOG. GOOD CMT FROM 50' TO 400'. POOR CMT FROM 400' DOWN. (RECORDS SHOWED A CASING SQUEEZE PATCH @ 1442', UNKNOWN AMOUNT OF CMT.) PLUG AT 1470' WITH 25 SX CMT. PLUG AT 600' WITH 48 SX CMT. CIRCULATED TO SURFACE. TOPPED OFF 4 1/2" WITH 4 SX CMT. PUMPED 34 SX CMT DOWN 4 1/2" X 8 5/8" ANNULUS.

Perfs:


Top	Bot	Thru	Comments
4878	4884		
4846	4857		
4822	4838		

INVOICED
DATE 4-23-08
INV. NO. 2008061594

RECEIVED
KANSAS CORPORATION COMMISSION
APR 14 2008
CONSERVATION DIVISION
WICHITA KS

Remarks: USED COMMON CEMENT BY SARGENTS.
Plugged through: TBG

District: 01

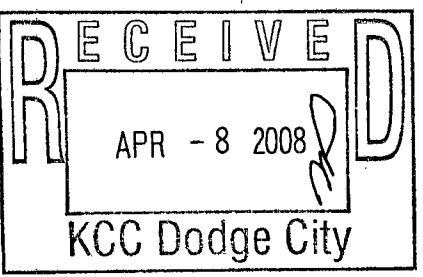

Signed Jack MacLaskey
(TECHNICIAN)

Form CR-23
PKT