

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Sedgwick County, Sec. 34 Twp. 28 Rge. 2 (E) (W)

Location as "NE/CNW/SW" or footage from lines SE NW NE
Lease Owner JOHN P. GATY
Lease Name Miller Well No. 1
Office Address 11 Cypress Drive, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed May 15, 1957 19
Application for plugging filed May 15, 1957 19
Application for plugging approved May 15, 1957 19
Plugging commenced May 15, 1957 19
Plugging completed May 15, 1957 19
Reason for abandonment of well or producing formation Dry hole

NORTH

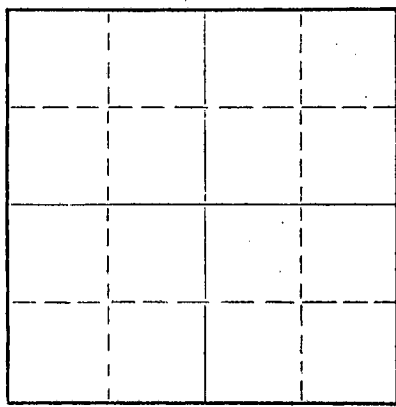

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production none 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well
Producing formation Simpson Depth to top 3342 Bottom 3361 Total Depth of Well 3361 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface	Water	0	106	8-5/8	106	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

3361-102 Fill w/heavy mud
102 Set Halliburton Plug, then 1/2 sax hulls, then 15 sx cement thru drill pipe, then fill w/ heavy mud.
30 Set Halliburton Plug, then 1/2 sx hulls, then 10 sx cement to base of cellar.



(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Shawver-Armour, Inc.
Address 817 Central Building, Wichita, Kansas

STATE OF Kansas COUNTY OF Sedgwick, ss.
James Armour (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James Armour James Armour
817 Central Building, Wichita, Kansas (Address)

Subscribed and sworn to before me this 22 day of May, 1957
My commission expires Dec. 29, 1959

Marjorie Hall Notary Public



PLUGGING
FILE SEC 34 T 28 R 2E
BOOK PAGE 13 LINE 42

DRILLING LOG

COMPANY: J. P. GATY
 CONTRACTOR: Shawver-Armour, Inc.
 FARM NAME: MILLER #1

LOCATION: SE NW NE
 Section 34-28-2E
 Sedgwick County
 ELEVATION: 1362

COMMENCE: May 4, 1957
 COMPLETE: May 15, 1957

CASING RECORD

106' 8-5/8" w/90 sx - 2% cc

FORMATION	TO		
Surface Clay & Shale & Shells	73		
Anhydrite	90		
Shells & Anhydrite	106		
Anhydrite & Shale	230	TOPS	
Shale & Lime	760		
Lime	785	Kansas City	2523
Shale & Lime Strks	985	Mississippi	3095
Shale	1200		
Shale & Lime	2105		
Sand, Shale & Lime	2270		
Shale & Lime	2410		
Shale & Lime Shells	2535		
Lime and Shale	2685		
Lime	2745		
Lime & Shale	3000		
Chert & Lime	3055		
Lime	3250		
Lime & Shale	3275		
Lime	3282		
Shale	3340		
Sand & Shale	3361 RTD		

STATE OF KANSAS)
) ss
 SEDGWICK COUNTY)

I, James Armour, do hereby certify that the above is a true and correct copy of the log on the above captioned well, as shown on the daily drilling reports.

Shawver-Armour, Inc.
James M. Armour
 By: James M. Armour Sec. Treasurer

Subscribed and sworn to before me
 this 22nd day of May 1957

Marjorie Hall
 Marjorie Hall, Notary Public

My commission expires Dec. 29, 1959



RECEIVED
 CORPORATION COMMISSION

MAY 24 1957

CONSERVATION DIVISION
 Kansas

PLUGGING
 SEC. 34 T. 28 R. 2E
 BOOK PAGE 13 LINE 42