


15-065-02249-0800

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH



Locate well correctly on above
Section Plat

Graham County. Sec. 25 Twp. 8 Rge. (E) 25 (W)
Location as "NE/CNWxSWx" or footage from lines. NE SW SE
Lease Owner I. W. Siegel, et al.
Lease Name Schanberger B Well No. 1
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed January 3, 19 56
Application for plugging filed August 26, 19 57
Application for plugging approved September 1, 19 57
Plugging commenced September 19, 19 57
Plugging completed September 28, 19 57
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	253	none
				5-1/2"	3895	1398.84

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded to 3860 - dumped 4 sacks cement - pulled pipe to 800' - circulated 40 sacks mud through 5-1/2" casing - pulled pipe to 650' - spotted 25 sacks cement - pulled pipe to 240' - spotted 20 sacks cement - finished pulling pipe - set rock bridge at 30' - dumped 10 sacks cement.

10/11/57 RECEIVED
CORPORATION COMMISSION
OCT 11 1957
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor R & D Casing Pulling Company License #236
Address Box 569, Ellinwood, Kansas


STATE OF KANSAS, COUNTY OF RICE, ss.
F. A. Wuellner (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) F. A. Wuellner
Sterling, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 10th day of October, 19 57

My commission expires Jan. 22, 1958

Bernard Landermilch
Notary Public.

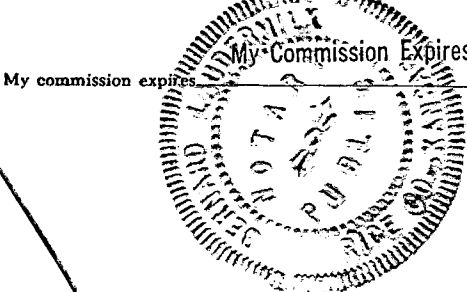

PLUGGING
FILE SEC 25T. 8 R. 25W
BOOK PAGE 40 LINE 11

15-065-02249-00-00

STERLING DRILLING COMPANY
Sterling, Kansas

WELL LOG-----SCHAMBERGER "B" #1

Location: NE SW 1/4, Section 25-8-25W,
Graham County, Kansas

OWNER: I. W. Siegel, et al
ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMMENCED: 12-21-55 (w.r.)
COMPLETED: 1-3-56 (w.r.)

TOTAL DEPTH: 3900'

LOG

0-975	Shale	
975-1870	Shale & Sand	
1870-2095	Shale	
2095-2130	Anhydrite	
2130-2170	Shale	
2170-2415	Shale & Shells	
2415-3170	Shale & Limestone	
3170-3255	Limestone	
3255-3410	Limestone & Shale	
3410-3520	Shale	
3520-3775	Limestone & Shale	
3775-3900	Limestone	T.D.

CASING RECORD

Ran 253' of 8-5/8" casing set with 175 sacks cement and 2 sacks calcium chloride.

Set 5-1/2" casing at 3895' with 75 sacks cement.

CABLE TOOLS M.I.C.F. Swabbed hole down. Perforated with 4 jets per foot from 3876 to 3882. Acidised with 3000 gal. Swabbed at rate of 2.5 B.F.P.H. Acidized with 5000 gal. Swabbed at rate of 2.5 B.F.P.H. M.O.C.T. . . . M.I.C.T. Sealed off first perforations. Perforated with fracturing gun with 2 shots at 3860' and 3864'. Acidized with 5000 gal. Swab tested at rate of 2 B.F.P.H. P.O.P.

This well was never pumped.

8/27/57

PLUGGING	
FILE	SEC. 25 T. 8 R. 25W
BOOK	PAGE 40 LINE 11