


15-065-00714-00-00

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

NORTH

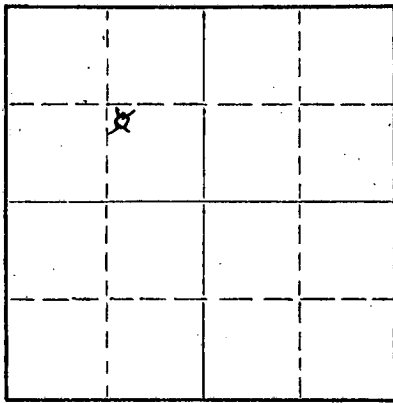

Locate well correctly on above
Section Plat

Graham County. Sec. 26 Twp. 8S Rge. 25W (E) (W)

Location as "NE/CNW%SW%" or footage from lines NW SE NW

Lease Owner Leben Drilling and Bergman Oil Co.

Lease Name Minium Well No. 1

Office Address 505 Orpheum Bldg, Wichita 2, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 9-10 19 55

Application for plugging filed 9-10 19 55

Application for plugging approved 9-10 19 55

Plugging commenced 9-10 19 55

Plugging completed 9-10 19 55

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19 _____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon R. Petty, Hays, Kansas

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4509 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	180	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged w/155 sks cement at
175 feet and 10 sks cment at
40 feet.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Leben Drilling Company

Address 505 Orpheum Building, Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Norma D. Sisson (employee of owner) or (~~owner~~) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Norma D. Sisson


Wichita, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 12th day of September, 19 55

My commission expires April 20, 1959

Notary Public.

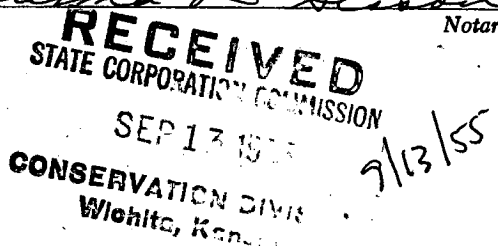

PLUGGING
FILE SEC 26 T 8 R 25W
BOOK PAGE 449 LINE 4

15-065-00714-00-00

CONTRACTOR'S WELL LOG

COMPANY: Bergman Oil Company and
 Contractor: Leben Drilling Company
 FARM: Leben Drilling Company
 LOCATION: Minium #1
 NW SE NW Sec. 26-8S-25W,
 Graham County, Kansas
 COMMENCED: August 27, 1955
 COMPLETED: September 10, 1955

0	180	Surface soil, shale
180	400	Shale
400	710	Shale, sand
710	1010	Shale
1010	1700	Shale, sand
1700	1935	Sand
1935	2000	Shale, shells
2000	2135	Red Bed
2135	2175	Anhydrite
2175	2705	Shale, shells
2705	2745	Lime, shale
2745	3142	Shale, lime
3142	3300	Lime
3300	3385	Shale, lime
3385	3405	Lime
3405	3713	Shale, lime
3713	3980	Lime
3980	4035	Shale
4035	4076	Shale, shells
4076	4118	Shale, lime
4118	4264	Shale
4264	4291	Mississippi Chert
4291	4300	Mississippi Lime
4300	4348	Lime
4348	4385	Lime, chert
4385	4488	Lime
4488	4509	Arbuckle Lime
	<u>4509</u>	<u>Rotary Total Depth, Dry and</u> <u>Abandoned</u>

Set 8 5/8" Surface Casing at 180 feet.


I, Norma D. Sisson, do hereby certify that the above and foregoing is a true and correct copy of the log of the Minium #1, NW SE NW Sec. 26-8S-25W, Graham County, Kansas, as reflected by the files of the Leben Drilling Company.

LEBEN DRILLING COMPANY

BY: Norma D. Sisson

STATE OF KANSAS)
COUNTY OF SEDGWICK) SS

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 12th day of September 1955.



Norma D. Sisson
Notary Public

My commission expires April 20, 1959

PLUGGING
FILE SEC 26 T 8 R 25W
BOOK PAGE 149 LINE 4

SEP 13 1955
CONSERVATION DIVISION
Wichita, Kansas