


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

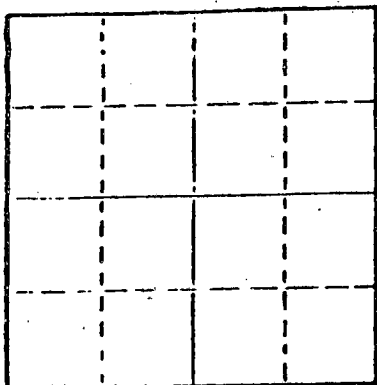

Locate well correctly on above  
Section Plat

Graham County. Sec. 26 Twp. 8 Rge. 24 E/W X  
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines  
NW/NW/SW

Lease Owner John O. Farmer, Inc.  
Lease Name KOBLER Well No. 1  
Office Address Box 352, Russell, Kansas 67665  
Character of Well (Completed as Oil, Gas or Dry Hole) \_\_\_\_\_

Date Well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging approved \_\_\_\_\_ 19\_\_\_\_  
Plugging commenced \_\_\_\_\_ July 18, 1977  
Plugging completed \_\_\_\_\_ July 26, 1977  
Reason for abandonment of well or producing formation \_\_\_\_\_

Depleted  
If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3890'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	167	-0-
				5 1/2"	3889'	1,191.55'


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Pushed a plug to 3675'. Dumped 25' of sand to 3650' and 4 sacks of cement.  
Shot casing at 3,000, 2500, 2200, 1800, 1300 and 1200'. Pulled 37 joints  
of 5 1/2" casing. Allied squeezed well with 3 sacks hulls, 8 sacks gel and  
100 sacks 50/50 Pozmix with 6% added gel.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rockhold Engineering, Inc.  
Box 698 Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Barton, ss.  
James W. Rockhold (employee of owner) or (~~owner~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well, and that the same are true and correct. So help me God.



(Signature) James W. Rockhold  
Box 698, Great Bend, Kansas 67530  
(Address)

Subscribed and sworn to before me this 3rd day of August, 1977

My commission expires September 30, 1979

Cathy Peacock  
Cathy Peacock Notary Public

Received: 8-4-1977

