

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Graham County, Sec 28 Twp 8S Rge 24W (E) (W)

Location as "NE/CNW/SW" or footage from lines SW NE SW

Lease Owner Imperial Oil of Kansas, Inc.

Lease Name Findley "B" Well No. 4

Office Address 780 Fourth National Bldg., Wichita 2, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil Well

Date well completed October 30 1956

Application for plugging filed June 17 1960

Application for plugging approved June 21 1960


Plugging commenced June 18 1960

Plugging completed June 23 1960

Reason for abandonment of well or producing formation Commercial quantities of oil depleted.

If a producing well is abandoned, date of last production June 18 1960

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

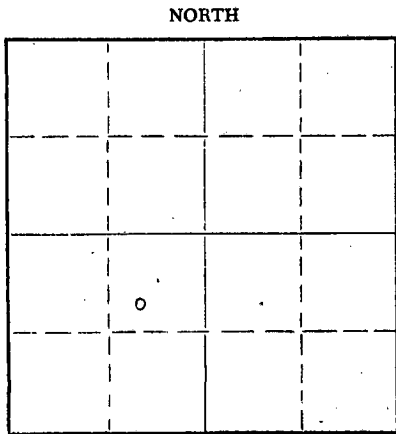

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. A. D. Fabricius

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3927 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	193'	Not pulled
				5-1/2"	3927'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Moved tools to location. Raised mast, checked hole, hung bailer on bottom at 3927' dug cellar, tried to work bailer free. Tried to free bailer, could not work free. shot off above bailer and sanded hole back to 3850' mixed and run 3 sacks cement. Took tension on pipe, worked pipe to 14" tension. Shot casing at 3003', 2727', no gain in tension. Working and shooting casing, shots at 2507', 2300', have pipe working free. Worked pipe free and pulled 73 jts. Mudded hole to 190' set 10' rock bridge with 25 sacks cement. Mudded hole to 40', set 10' rock bridge, mixed and run 10 sacks cement to base of cellar. Loaded unit, Cut off Braden Head. Well complete.

RECEIVED  
STATE CORPORATION COMMISSION  
7-12-1960  
JUL 12 1960


Name of Plugging Contractor Southwest Casing Pulling Company  
Address P. O. Box 364, Great Bend, Kansas

CONSERVATION DIVISION  
Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
K. J. Boone (employee of owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. IMPERIAL OIL OF KANSAS, INC.

(Signature) By: [Signature] Pet. Engr.  
780 Fourth National Bldg., Wichita 2, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of June, 1960  
My commission expires July 7, 1962



[Signature]  
Notary Public.

Re  
DRILLER'S LOG

Imperial Oil of Kansas, Inc.  
903 Union National Building  
Wichita 2, Kansas

Findley "B" No. 4  
SW NE SW Sec. 28-8S-24W  
Graham County, Kansas

Total Depth: 3927'  
Elevation: 2393' R.B.  
Commenced: 9-19-56 Completed: 10-30-56 Production: 41 BOPD, no water  
Contractor: Imperial Oil of Kansas, Inc.  
Wichita, Kansas

Casing Record: Set 8-5/8" Surface Pipe at 193 feet with 150 sacks cement.

Figures indicate bottom of formations:


Rock & Clay	35'		
Shale & Shells	197'		
Shale	760'		
Sand & Shale	1340'	Anhydrite	2086' ( / 307 )
Shale	1610'	Lansing	3726' ( -1333 )
Sand	1790'	Rotary Total Depth	3927' ( -1534 )
Shale	1800'		
Shale, Sand & Red Bed	2028'		
Shale & Red Bed	2047'		
Anhydrite	2075'		
Shale	2085'		
Shale & Red Bed	2360'		
Shale & Lime	3571'		
Lime	3912'		

RECEIVED  
STATE CONSERVATION COMMISSION  
7-12-1960  
JUL 12 1960  
CONSERVATION DIVISION  
Wichita, Kansas

We hereby certify this to be a correct and accurate log of the above described well as shown on the daily drilling reports.

IMPERIAL OIL OF KANSAS, INC.

By: Ray L. Dean  
Vice-President



Subscribed and sworn to before me this 23rd day of November, 1956.

My Commission Expires:

April 18, 1959

Francis E. Barkham  
Notary Public