


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Graham County. Sec. 29 Twp. 8S Rge. 24W (E) (W)
Location as "NE/CNW&SW" or footage from lines NW SE SW

Lease Owner The Texas Company
Lease Name B. A. Fox Well No. 1
Office Address 614 Bitting Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry
Date well completed Sept. 3 19 52
Application for plugging filed Sept. 10 19 52
Application for plugging approved Sept. 11 19 52
Plugging commenced Sept. 20 19 52
Plugging completed Sept. 21 19 52
Reason for abandonment of well or producing formation _____

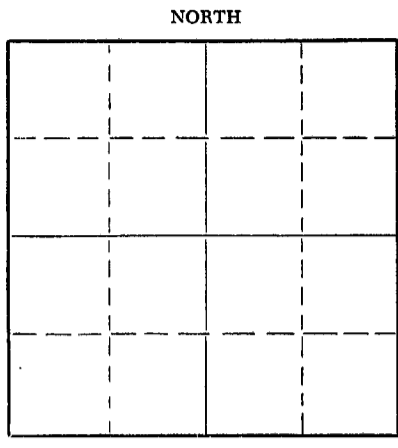

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4400' Feet
Show depth and thickness of all water, oil and gas formations. PBTD 3645'

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4"	317'	0'
				7"	3951'	3181'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

PLUGGED AS FOLLOWS

3645' to 310' - Heavy Mud
310' to 300' - Rock Bridge
300' to 280' - 20 Sacks Cement
280' to 30' - Heavy Mud
30' to 25' - Rock Bridge
25' to bottom of cellar - 10 Sacks Cement

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Jayhawk Well Service
Address Russell, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
M. C. Harrell (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) M. C. Harrell
614 Bitting Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 23rd day of September, 19 52
H. Howard Fister
Notary Public.

My commission expires September 20, 1956

24-2675-5 2-52-20M

RECEIVED
STATE CORPORATION COMMISSION

SEP 21 1952
9-24-1952
CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC 29 T 8 R 242
BOOK PAGE 42 LINE 42