


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

15-069-00519-00-00

WELL PLUGGING RECORD

NORTH

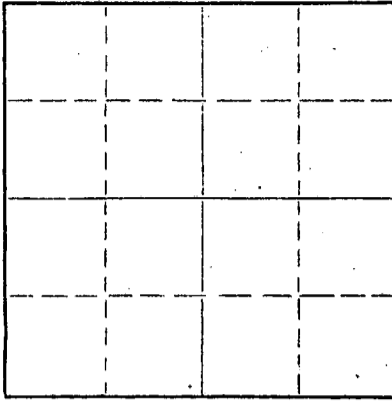

Locate well correctly on above
Section Plat

Graham County. Sec. 29 Twp. 8 Rge. 23 (~~E~~ W) (W)
Location as "NE/CNW/SW" or footage from lines SW SW NW
Lease Owner Woodman & Tannitti and Sunray
Lease Name Kobler Well No. 1
Office Address P. O. Box 387, Hoisington, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 5-28-1958
Application for plugging filed 5-28-1958
Application for plugging approved 5-28-1958
Plugging commenced 5-28-1958
Plugging completed 5-28-1958
Reason for abandonment of well or producing formation Dry.

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes.

Name of Conservation Agent who supervised plugging of this well A. D. Fabricius
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3905 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	143	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Bottom plug 550' - 25 sacks cement. Middle plug 140' - 15 sacks cement.
Top plug 40' - 10 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION

JUN 2 1958

CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Woodman & Tannitti Drilling Co. 62-58
Address P. O. Box 387, Hoisington, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK, ss.
K. T. Woodman (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. T. Woodman
714 Union National Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 29th day of May, 1958
My commission expires March 15, 1961
Mildred E. Lick
Mildred E. Lick, Notary Public.



PLUGGING
FILE SEC. 29 T. 8 R. 23W
BOOK PAGE 104 LINE 21

DRILLING LOG

Company: Woodman & Iannitti and Sunray
 Lease: #1 KOBLER SW SW NW 29-8-23W
 Graham County, Kansas
 Contractor: Woodman & Iannitti Drilling Co.
 Box 387, Hoisington, Kansas
 Date Commenced: 5-18-58
 Date Completed: 5-28-58
 Total Depth: 3905'
 Casing: 8 5/8" cemented at 143' with 90 sacks cement

Figures Indicate the Bottom of Formation

0-105	Sand
143	Blue Shale
745	Shale
1450	Shale - Sand
1825	Red Bed - Sand
2018	Red Bed
2055	Anhydrite
2410	Shale - Shells
2525	Lime
2670	Lime - Shale
3418	Lime
3518	Lime - Shale
3905	Lime

GEOLOGICAL TOPS

Elevation	2319 RB
Anhydrite	2012 /307
Reebner	3635 -1316
Toronto	3660 -1341
Lansing	3600 -1361
Base/h.J.	3898 -1579
Total Depth	3905 -1386

I certify the above to be a true and correct copy of the Driller's Log and Geological Tops to the best of my knowledge and belief.

WOODMAN & IANNITTI DRILLING CO.

By: K. F. Woodman
 K. F. Woodman

6-2-58

