


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

15-065-02234-00-00

WELL PLUGGING RECORD



Locate well correctly on above Section Flat

Graham County, Sec. 2 Twp. 8 Rge. (E) 24 (W)

Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SE $\frac{1}{2}$  SW $\frac{1}{2}$  SE $\frac{1}{2}$

Lease Owner Barnett Oil Company, et al

Lease Name Welty Well No. 1

Office Address 417 First Nat'l Bank Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed November 10 19 50

Application for plugging filed November 10 19 50

Application for plugging approved November 10 19 50

Plugging commenced November 10 19 50

Plugging completed November 10 19 50

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production - 19 -

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas

Producing formation Depth to top Bottom Total Depth of Well 3846 Feet

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Surface Casing			115'	8 5/8"	115'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud from 3846 feet to 115 feet. Set wooden plug at 115 feet and filled surface pipe with 1 sack of hulls and 15 sacks of cement to 98 feet. Filled surface pipe with heavy mud from 98 feet to 40 feet. Set wooden plug at 40 feet and filled surface pipe with 1 sack of hulls and 10 sacks of cement to bottom of cellar.

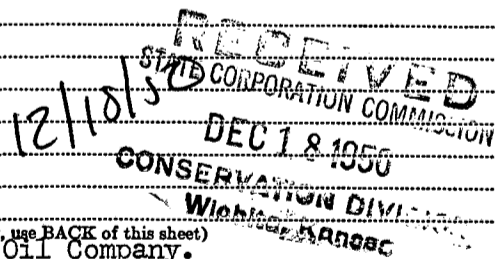

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Barnett Oil Company.

Address 417 First National Bank Bldg., Wichita, Kansas.

STATE OF Kansas, COUNTY OF Sedgwick, ss.

W. R. Hunter (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. R. Hunter

First Nat'l Bank Bldg., Wichita, Kansas

(Address)

SUBSCRIBED AND SWORN to before me this 8th day of December, 19 50

Adelaide Olivier

Notary Public.

My commission expires May 12, 1950

28-5091-s 8-50-10M

PLUGGING  
FILE SEC 2 T 8 R 24  
BOOK PAGE 48 LINE 16

15-065-02234-00-00

DRILLER'S LOG

Company: Peel-Hardman  
Barnett Oil Company  
Derby Oil Company  
R. W. Shields

Sec. 2, Twp. 8S, Rge. 24W  
SE SW ~~SW~~SE

Farm: Welty Well No. 1

County: Graham,  
Kansas

Total Depth: 3846'

Contractor: Glenn Peel Drilling Co., Inc.  
Comm.: 10-31-50 Comp.: 11-10-50  
Casing:  
8 5/8" 145' cem.

Elevation:  
Production: Dry

Figures below indicate bottom of formations

Shale	0 -	80
Shale, Sand and Shells		145
Shale and Sand		1500
Anhydrite		1955
Shale		1995
Shale and Lime		2220
Lime and Shale		2460
Shale and Lime		2765
Lime and Shale		2910
Shale and Lime		3070
Lime and Shale		3085
Lime		3365
Total Depth		3846

This is to certify that the above information is, to the best of our knowledge, true and correct.

GLENN PEEL DRILLING COMPANY, INC.

BY: J. B. [Signature]



SUBSCRIBED AND SWORN to before me this 20<sup>th</sup> day of November, 1950

My commission expires June 4, 1951

Marion M. Hartel  
Notary Public

**PLUGGING**  
FILE SEC 2T 8 R 24W  
BOOK PAGE 42 LINE 16

**RECEIVED**  
STATE CORPORATION COMMISSION  
NOV 21 1950  
CONSERVATION DIVISION  
Wichita, Kansas  
11/21/50