

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-151-30118-00-00  
Spot: NESE Sec/Twnshp/Rge: 10-26S-15W  
2091 feet from S Section Line, 560 feet from E Section Line  
Lease Name: NEELY Well #: 5  
County: PRATT Total Vertical Depth: 4300 feet

Operator License No.: 30560  
Op Name: CROCKETT OIL AND GAS, INC.  
Address: 202 N. MAIN  
SHARON, KS 67138

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	4300	1554	WITH 100 SX CMT
SURF	8.625	308		WITH 300 SX CMT

139.75

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 04/25/2008 9:00 AM  
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.  
Proposal Rcvd. from: AL BULMARO Company: MIKE'S TESTING & SALVAGE, INC. Phone: (620) 938-2537

Proposed Plugging Method: SAND BOTTOM TO 3930' & 5 SX CMT. PLUG AT 1000' WITH 15 SX GEL & 50 SX CMT. PLUG AT 340' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: RICHARD LACEY  
Date/Time Plugging Completed: 04/25/2008 10:30 AM

Witness Type: COMPLETE (100%)  
KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SANDED BACK TO 3880' & PUT 4 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. 1ST PLUG AT 1000' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 340' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
3983	4003		

INVOICED

DATE 5-1-08  
INV. NO. 2008061642

RECEIVED  
KANSAS CORPORATION COMMISSION


Remarks: USED 60/40 POZMIX 4% GEL BY COPELAND.

Plugged through: CSG

**APR 30 2008**

CONSERVATION DIVISION  
WICHITA, KS

District: 01

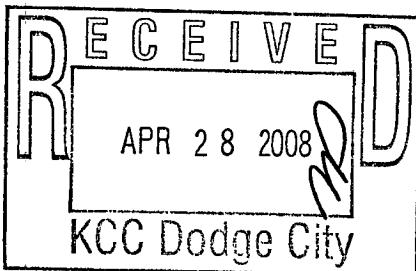

Signed

*Stephen J. Pfeifer*  
(TECHNICIAN)