

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-175-20106-00-01  
Spot: NWNE Sec/Twnshp/Rge: 11-34S-31W  
660 feet from N Section Line, 1980 feet from E Section Line  
Lease Name: BLACK Well #: 1  
County: SEWARD Total Vertical Depth: 6134 feet

Operator License No.: 34029  
Op Name: GAMMA RESOURCES INC.  
Address: PO BOX 800  
LIBERAL, KS 67905

String	Size	Depth (ft)	Pulled (ft)	Comments
L1	4.5	3175	2062	WITH 100 SX CMT <i>199.36</i>
L2	3.5	3623		WITH 55 SX CMT
PKR		4278		MODEL D CMTD W/15 SX CMT
PROD	7	4466	1558	WITH 375 SX CMT
SURF	9.625	1507		WITH 900 SX CMT

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 04/22/2008 8:00 AM  
Plug Co. License No.: 33338 Plug Co. Name: ORR ENTERPRISES, INC.  
Proposal Rcvd. from: RONNIE ORR Company: ORR ENTERPRISES, INC. Phone: (580) 251-9618

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGIN REPORT

Plugging Proposal Received By: STEVE DURRANT Witness Type: COMPLETE (100%)  
Date/Time Plugging Completed: 04/22/2008 4:00 PM KCC Agent: JACK MACCLASKEY

Actual Plugging Report:

MODEL D PACKER @ 4278' WITH 15 SX CMT. 1ST PLUG AT 3520' WITH 20 SX CMT IN 3 1/2". 2ND PLUG AT 2050' WITH 25 SX CMT. 3RD PLUG AT 1550' WITH 75 SX CMT. 4TH PLUG AT 600' WITH 40 SX CMT. 5TH PLUG AT 33' WITH 15 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4310	4314		
3568	3570		
3106	3110		


**INVOICED**  
DATE 5-1-08  
INV. NO. 2008061647

RECEIVED  
KANSAS CORPORATION COMMISSION  
**APR 28 2008**  
CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY ORR ENTERPRISES.

Plugged through: TBG

District: 01

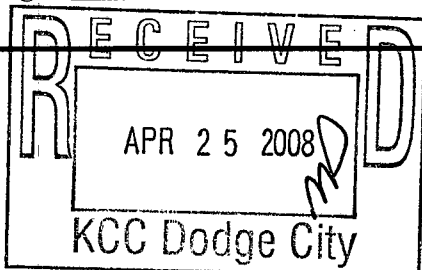

Signed

*Jack MacClaskey*  
(TECHNICIAN)