

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-093-00618-00-00
Spot: NENESW Sec/Twnshp/Rge: 22-22S-36W
2310 feet from S Section Line, 2310 feet from W Section Line
Lease Name: DIENST Well #: 2
County: KEARNY Total Vertical Depth: 2692 feet

Operator License No.: 32787
Op Name: KANSAS NATURAL GAS OPERATING, I
Address: 1200 MAIN ST PO BOX 818
HAYS, KS 67601

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		900		
CIBP		2552		WITH 2 SX CMT
PROD	5.5	2687	0	WITH 125 SX CMT
SURF	8.625	300		WITH 300 SX CMT

87.49

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 04/23/2008 10:00 AM
Plug Co. License No.: 99997 Plug Co. Name: HALLIBURTON ENERGY SERVICES
Proposal Rcvd. from: STEVEN MARK LEHNING Company: KANSAS NATURAL GAS Phone: (620) 675-8185

Proposed Plugging Method: SET CIBP WITH 2 SX CMT. PUMP CASING VOLUME PLUS 80 SX CMT. PUMP 150 SX CMT DOWN ANNULUS.

Plugging Proposal Received By: KEN JEHLIK Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 04/23/2008 12:00 PM KCC Agent: JACK MACLASKEY

Actual Plugging Report:

CIBP @ 2552' WITH 2 SX CMT & CIBP @ 900'. TESTED 5 1/2" FROM SURFACE TO 900' @ 700 PSI. PERFORATE 5 1/2" @ 850'. PUMPED INTO 5 1/2" & PUMPED 216 SX CMT AT 600 PSI. PUMPED INTO BACK SIDE OF 5 1/2" & PUMPED 84 SX CMT AT 34 PSI. PRESSURED UP & HELD.

Perfs:

Top	Bot	Thru	Comments
2668	2676		
2614	2634		


INVOICED
DATE 5-1-08
INV. NO. 2008061650

RECEIVED
KANSAS CORPORATION COMMISSION
APR 28 2008
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY HALLIBURTON.

Plugged through: CSG

District: 01

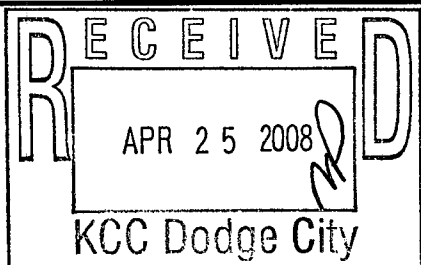

Signed

Jack MacLaskey
(TECHNICIAN)

Form CP 278

[Handwritten signature]
PKT