

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-119-10010-00-01  
Spot: NWSE Sec/Twnshp/Rge: 36-32S-30W  
2000 feet from S Section Line, 2017 feet from E Section Line  
Lease Name: COLLINGWOOD Well #: 2  
County: MEADE Total Vertical Depth: 4480 feet

Operator License No.: 7943  
Op Name: WEST PLAINS ENTERPRISES, INC  
Address: PO BOX 279  
PLAINS, KS 67869

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		3050		WITH 2 SX CMT
PROD	5.5	4073	1824	WITH 275 SX CMT <u>145.60</u>
SURF	8.625	1544		WITH 850 SX CMT

Well Type: SWD UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 04/17/2008 10:00 AM  
Plug Co. License No.: 33645 Plug Co. Name: H2 PLAINS, LLC  
Proposal Rcvd. from: ALLAN WALKER Company: WEST PLAINS ENTERPRISES Phone: \_\_\_\_\_

Proposed Plugging Method: CIBP WITH 2 SX CMT AT 3400'. FREEPOINT & PULL CASING. PUMP 12-15 SX GEL & 50 SX CMT AT 1575'. PLUG AT 600' WITH 50 SX CMT. PLUG AT 60' WITH 20 SX CMT

Plugging Proposal Received By: KEN JEHLIK Witness Type: COMPLETE (100%)  
Date/Time Plugging Completed: 04/17/2008 2:30 PM KCC Agent: JERRY W. STAPLETON

Actual Plugging Report:

TOC @ 2920'. SET CIBP @ 3050' WITH 2 SX CMT. 1ST PLUG AT 1609' WITH 38 BBLS GEL & 50 SX CMT. 2ND PLUG AT 620' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 60 SX CMT. CMT TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
3784	3820		
3598	3608		
3558	3574		
3475	3525		

**INVOICED**  
DATE 5-1-08  
INV. NO. 2008061652

RECEIVED  
KANSAS CORPORATION COMMISSION


APR 30 2008

CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY BASIC ENERGY.

Plugged through: CSG

District: 01

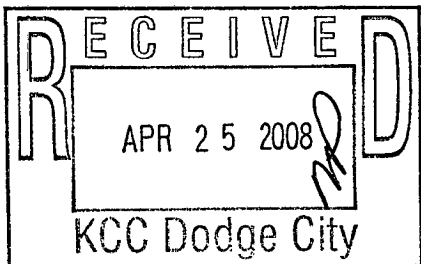

Signed \_\_\_\_\_

Jerry W. Stapleton  
(TECHNICIAN)

PKT