

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
200 Colorado Derby Building  
Wichita, Kansas 67202

WELL PLUGGING RECORD  
K.A.R.-82-3-117

API NUMBER 15-015-22,977-00-00

LEASE NAME Goeken

WELL NUMBER #1

2310 Ft. from S Section Line

3630 Ft. from E Section Line

SEC. 25 TWP. 28 RGE. 3 (E) ~~XXXX~~

COUNTY Butler

Date Well Completed 05-05-87

Plugging Commenced 05-05-87

Plugging Completed 05-05-87

TYPE OR PRINT  
NOTICE: Fill out completely  
and return to Cons. Div.  
office within 30 days.

LEASE OPERATOR Teichgraeber Oil Operations

ADDRESS P. O. Box 471, El Dorado, KS 67042

PHONE# (316) 321-2770 OPERATORS LICENSE NO. 6101

Character of Well Oil

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Did you notify the KCC District Office prior to plugging this well? Yes

Which KCC Office did you notify? Steve Van Gieson

Is ACO-1 filed?                      If not, is well log attached? Yes

Producing Formation                      Depth to Top                      Bottom                      T.D. 3015

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
	Surface	0	204	8 5/8"	202'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to      feet each set.  
35 sacks @ 2990'; 35 sacks @ 250'; 25 sacks @ 60'; 10 sacks in rathole

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor EDCO Drilling Company, Inc. License No. 5676

Address P. O. Box 645, El Dorado, KS 67042

STATE OF Kansas COUNTY OF Butler, ss.


(Employee of Operator) or                      of                      of                     ,  
above-described well, being first duly sworn on oath, says: That I have knowledge of the facts,  
statements, and matters herein contained and the log of the above-described well as filed that  
the same are true and correct, so help me God.

(Signature) W.K. Teichgraeber

(Address) P. O. Box 645, El Dorado, KS 67042

SUBSCRIBED AND SWORN TO before me this 7<sup>th</sup> day of May, 19 87

Greg Wehling  
Notary Public

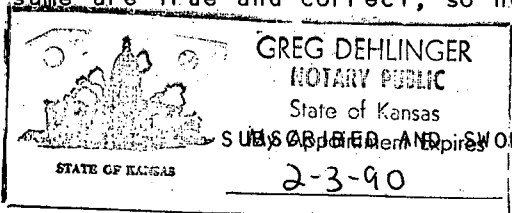


My Commission Expires: 02-03-90

RECEIVED  
STATE CORPORATION COMMISSION  
5/8/87  
MAY 8 1987  
CONSERVATION DIVISION  
Wichita, Kansas



# DRILLING COMPANY, INC.



~~W. WESTMOROCK~~ — P.O. BOX 645 — EL DORADO, KANSAS 67042

May 7, 1987

To: Teichgraeber Oil  
P. O. Box 471  
El Dorado, KS 67042

Lease: Goeken #1

Location: Sec. 25, Twp. 28, Rg. 3E  
Butler County, Kansas

Drilling Dates: April 28, 1987 through May 5, 1987

## Drilling Log:

Surface TD: 204'  
Surface Set: 202' of 8 5/8" surface casing  
Cemented By: Sun Cementing

0 - 204	Surface hole
204 - 1871	Shale and lime
1871 - 1943	Shale
1943 - 2155	Lansing lime
2155 - 2278	Bonner Springs shale
2278 - 2475	Kansas City
2475 - 2565	Shale w/lime
2565 - 2652	Marmaton group
2652 - 2670	Lime
2670 - 2716	Shale
2716 - 2883	Mississippi
2883 - 2981	Kinderhook
2981 - 2991	Simpson
2991 - 3015	Arbuckle
3015	TD

RECEIVED  
STATE CORPORATION COMMISSION

MAY 8 1987

CONSERVATION DIVISION  
Wichita, Kansas