

TO:  
 STATE CORPORATION COMMISSION  
 CONSERVATION DIVISION - PLUGGING  
 130 SOUTH MARKET, SUITE 2078  
 WICHITA, KANSAS 67202

API Well Number: 15-185-21677-00-00  
 Spot: NESWSE Sec/Twnshp/Rge: 8-22S-14W  
990 feet from S Section Line, 1650 feet from E Section Line  
 Lease Name: ESTES Well #: 2  
 County: STAFFORD Total Vertical Depth: 3895 feet

Operator License No.: 4058  
 Op Name: AMERICAN WARRIOR, INC.  
 Address: PO BOX 399  
GARDEN CITY, KS 67846

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	3891	0	WITH 200 SX CMT
SURF	8.625	330		WITH 280 SX CMT

126.59

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 02/29/2008 9:00 AM  
 Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY  
 Proposal Rcvd. from: KEVIN WILES Company: AMERICAN WARRIOR Phone: (620) 275-2963

Proposed Plugging Method: SAND TO 3500' W/2 SX CMT. PLUG AT 880' WITH 15 SX GEL & 50 SX CMT. PLUG AT 360' WITH 50 SX CMT. PLUG AT 40' WITH 15 SX CMT.

Plugging Proposal Received By: JERRY W. STAPLETON Witness Type: COMPLETE (100%)  
 Date/Time Plugging Completed: 03/03/2008 3:01 PM KCC Agent: RICHARD LACEY

**Actual Plugging Report:**

TBG FISH @ 1320'. ROD FISH @ 1120'. ATTEMPTED TO WASH OVER TBG BUT LOST CIRCULATION. RAN TBG TO 1211'. PUMPED 50 BBLs DRILLING MUD & 50 SX COMMON CMT W/4% CC. NO CIRCULATION. 3/3/08: TAGGED CMT AT 744' WITH TBG. PERFORATED AT 662.5'. COULDN'T GET GUN PAST 670'. RAN TBG TO 682'. PUMPED 200 SX CMT DOWN TBG. CIRCULATED CMT TO SURFACE UP 5 1/2" AND 8 5/8" X 5 1/2" ANNULUS. PULLED TBG. TOPPED OF HOLE WITH 10 SX CMT.

**Perfs:**

Top	Bot	Thru	Comments
3859	3862		
3669	3672		
3605	3609		

**INVOICED**


DATE 3-25-08  
 INV. NO. 2008061400

RECEIVED  
 KANSAS CORPORATION COMMISSION  
**MAR 17 2008**  
 CONSERVATION DIVISION  
 WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: TBG

District: 01

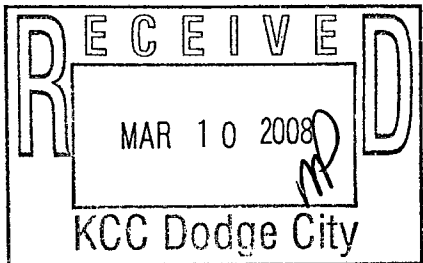

Signed Richard W. Lacey  
 (TECHNICIAN)

Form 62-73