

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-185-22110-00-00  
Spot: SENENWSE Sec/Twnshp/Rge: 8-22S-14W  
2220 feet from S Section Line, 1650 feet from E Section Line  
Lease Name: ESTES Well #: 3  
County: STAFFORD Total Vertical Depth: 4032 feet

Operator License No.: 4058  
Op Name: AMERICAN WARRIOR, INC.  
Address: PO BOX 399  
GARDEN CITY, KS 67846

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		3502		WITH 1 SX CMT
PROD	5.5	4001	0	
SURF	8.625	344		WITH 250 SX CMT

13104

Well Type: EOR UIC Docket No: E23873.1 Date/Time to Plug: 02/27/2008 1:30 PM  
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY  
Proposal Rcvd. from: KEVIN WILES, SR. Company: AMERICAN WARRIOR Phone: (620) 275-2963

Proposed Plugging Method: SAND TO 3500' & 2 SX CMT OR CIBP @ 3470' WITH 3 SX CMT. PLUG AT 880' WITH 15 SX GEL & 50 SX CMT. PLUG AT 360' WITH 50 SX CMT. PLUG AT 40' WITH 15 SX CMT.

Plugging Proposal Received By: JERRY W. STAPLETON WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 02/27/2008 2:50 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

SET CIBP @ 3502' & 1 SX CMT. PERFORATED AT 880'. RAN TBG TO 890'. PUMPED 80 SX CMT. CIRCULATED CMT TO SURFACE UP 5 1/2". SHUT IN 5 1/2". PRESSURED TO 1000 SPIG. PRESSURE BROKE DOWN & CIRCULATION STARTED UP 8 5/8" X 5 1/2" ANNULUS. PUMPED 180 SX CMT & BROUGHT CMT TO SURFACE UP 8 5/8" X 5 1/2" ANNULUS. PULLED TBG. TOPPED OFF HOLE WITH 10 SX CMT.

Perfs:

Top	Bot	Thru	Comments
3520	3610		

INVOICED

DATE 3-25-08  
INV. NO. 2008061400


RECEIVED  
KANSAS CORPORATION COMMISSION  
MAR 17 2008

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: CSG

CONSERVATION DIVISION  
WICHITA, KS

District: 01

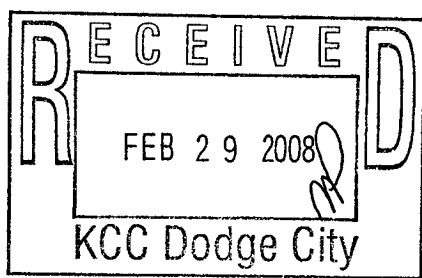

Signed Richard W. Lacey  
(TECHNICIAN)

Form CP-2/3  
*[Handwritten initials]*