

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-185-13209-00-00  
Spot: N2SESE Sec/Twnshp/Rge: 16-22S-14W  
990 feet from S Section Line, 660 feet from E Section Line  
Lease Name: OSCAR WEST Well #: 102  
County: STAFFORD Total Vertical Depth: 3615 feet

Operator License No.: 33809  
Op Name: BELPORT OIL, INC.  
Address: 1443 S NORFOLK AVE  
TULSA, OK 74120

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	3608	864	WITH 75 SX CMT
SURF	8.625	418		WITH 375 SX CMT

117.49

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 03/04/2008 12:35 PM  
Plug Co. License No.: 99981 Plug Co. Name: COPELAND ACID & CEMENT, INC.  
Proposal Rcvd. from: GEORGE DAVENPORT Company: BELPORT OIL INC. Phone: (918) 584-8989

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING REPORT.

Plugging Proposal Received By: RICHARD LACEY  
Date/Time Plugging Completed: 03/05/2008 2:05 PM

Witness Type: COMPLETE (100%)  
KCC Agent: RICHARD LACEY

Actual Plugging Report:

COULDN'T GET PAST 1100' AFTER 3 TRY'S. CASING PARTED OVER 15 YEARS AGO. RAN TBG TO 1080'. PUMPED 50 SX 60/40 POZMIX 4% GEL 3% CC DOWN TBG. PERFORATED AT 900'. RAN TBG TO 899'. PUMPED 280 SX CMT DOWN TBG. GOOD CIRCULATION UP BOTH 8 5/8" & 5 1/2". NO CMT. COMPANY DECIDED TO PULL CASING. PULLED 864' OF 5 1/2". RAN TBG TO 682'. PUMPED 330 SX CMT DOWN TBG. CIRCULATED CMT TO SURFACE UP 8 5/8". PULLED TBG. HOLED STAYED FULL.

Perfs:

Top	Bot	Thru	Comments
3608	3615	OH	

INVOICED


DATE 3-25-08  
INV. NO. 2008061401

RECEIVED  
KANSAS CORPORATION COMMISSION  
MAR 17 2008  
CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY COPELAND ACID.

Plugged through: TBG

District: 01

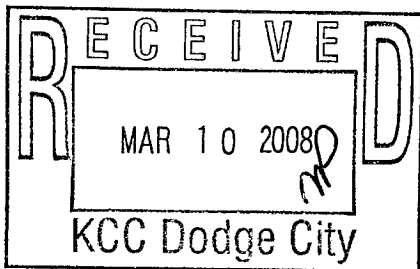

Signed

*Richard M. Lacey*

(TECHNICIAN)

*PLT*