

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-171-20636-00-00  
Spot: SENW Sec/Twnshp/Rge: 4-19S-31W  
1980 feet from N Section Line, 1980 feet from W Section Line  
Lease Name: JANSSEN Well #: 6-4-1931  
County: SCOTT Total Vertical Depth: 4794 feet

Operator License No.: 33476  
Op Name: FIML NATURAL RESOURCES, LLC  
Address: 410 17TH ST STE 900  
DENVER, CO 80202

| String | Size  | Depth (ft) | Pulled (ft) | Comments                      |
|--------|-------|------------|-------------|-------------------------------|
| DVT    |       | 2981       |             | CMT TO SURFACE                |
| PROD   | 5.5   | 4776       | 0           | WITH 810 SX CMT <b>155.81</b> |
| SURF   | 8.625 | 392        |             | WITH 225 SX CMT               |

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 02/28/2008 11:30 AM  
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY  
Proposal Rcvd. from: EDDIE ABERCROMBIE Company: \_\_\_\_\_ Phone: (620) 793-2816

Proposed Plugging Method: PUMP 300# HULLS & 40 SX CMT GEL TO 2981-0'. PRESSURE TEST 8 5/8" X 5 1/2" ANNULUS.

Plugging Proposal Received By: RICHARD LACEY Witness Type: COMPLETE (100%)  
Date/Time Plugging Completed: 02/28/2008 1:00 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:  
PUMP 300# HULLS & 40 SX CMT AT 4613'. PUMP 20 BBLs GEL & 310 SX CMT FROM 2980' TO 0'. PRESSURE TO 200#. HOLDING AT 150#. HOOK UP TO ANNULUS & PRESSURED TO 500#. CEMENTED TO SURFACE.


Perfs:

| Top  | Bot  | Thru | Comments |
|------|------|------|----------|
| 4611 | 4613 |      |          |
| 4588 | 4592 |      |          |
| 4575 | 4579 |      |          |
| 4384 | 4386 |      |          |
| 4212 | 4218 |      |          |
| 3947 | 3952 |      |          |

**INVOICED**  
DATE 3-25-08  
INV. NO. 2008061406  
RECEIVED  
KANSAS CORPORATION COMMISSION  
MAR 17 2008  
CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.  
Plugged through: CSG

District: 01

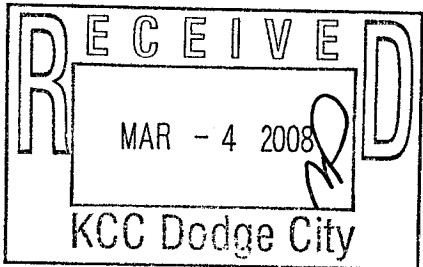

Signed Ken Jehlik (TECHNICIAN)

*[Handwritten initials]*