


R

DISTRICT CONSERVATION AGENT'S REPORT

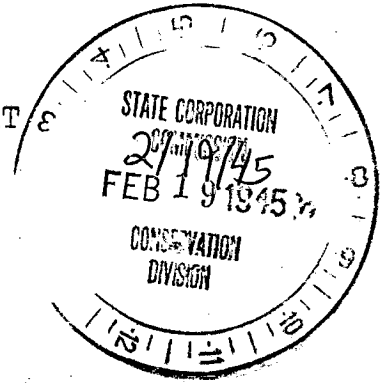

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. _____

LOCATION SE NESE

SEC. 36 TWP. 27 RGE. 2E

Dry Hole _____ Abandoned Oil Well _____ Abandoned Gas Well ✓

I have today completed supervision of plugging of:

Well No. 1 Lease Free

Operator Francis Raymond Address Wichita

Field ✓ County Sedgewick

Total Depth 2025' Feet.

(Describe briefly the manner in which the well was plugged)

Mud and 5 cu cement in bottom of hole.
5" and 10" casing cement together in base
5" Ripped at 1065' 10" Ripped at 990'
Mud to 190' Rock bridge and 15 cu cement to 150'
20" Surface pipe at 65'
Mud from 150' to base of cellar
10 cu cement in base of cellar

D. O. Ellis
District Conservation Agent
Date Jan 30, 1945

36 27 2E
135 43