

STATE OF KANSAS
STATE CORPORATION COMMISSION

R


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

Graham County. Sec. 4 Twp. 8 Rge. - (E) 24(W)

Location as "NE/CNWxSWx" or footage from lines NE SE SE
Lease Owner E. K. Carey Contractor
Lease Name U. S. Goff Well No. 1
Office Address P. O. Box 620, McPherson, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed December 30, 1953
Application for plugging filed May 5, 1960
Application for plugging approved May 9, 1960
Plugging commenced July 6 1960
Plugging completed July 15 1960
Reason for abandonment of well or producing formation Non Commercial

NORTH

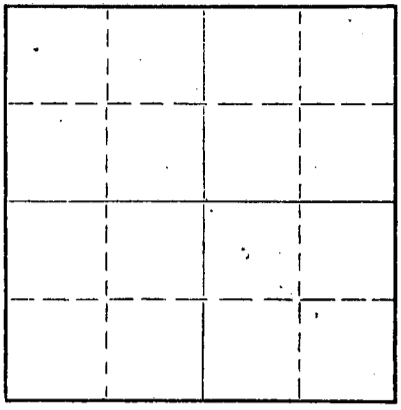

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production November 30, 1957
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Fabricius
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3805 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	131'	None
				5-1/2"	3805'	1595'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Dumped 3 sacks of cement at 3612'. Shot pipe off at 1595'. Pulled pipe and mudded hole to 130'. Set 10' Rock Bridge and dumped 25 sacks of cement. Mudded to 40'; set 10' Rock Bridge and dumped 10 sacks of cement at base of cellar.


RECEIVED
STATE CORPORATION COMMISSION
JUL 25 1960
7-25-1960
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Bert Self
Address R. R. #4, Hutchinson, Kansas

STATE OF Kans. COUNTY OF Peno ss.

Employee (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bert Self
R. R. #4, Hutchinson, Kans.



SUBSCRIBED AND SWORN to before me this 21st day of July, 1960
Dorothy Self
Notary Public.

August 12, 1961

ROTARY MILLER'S LOG

W. C. Carey Contractor - Operator
Box 620
Pfeffer, Kansas

Elevations: 2330 a.s.l.
2327 b.s.l.
2325 dr.

U.S. Corral

7, NE 34 SW
Sec. 4-30-24E
Graham County, Kansas

5-5/8" x 5 1/2" Head 3.20'
below a. l.

Casing Records:

Well Commenced: 12-13-53
Well Completed: 12-30-53

5-5/8" 131' w/35 sks.
100' cc.
5-1/2" 3308' w/100 sks.

Contractor: W. C. Carey Contractor, Bldg. 1, Box 620, Pfeffer, Kansas
Geologist: Don Bellar, W. C. Carey Drilling Co. 216 Central Bldg. Wichita

Figures indicate bottom of formation . . .

Base of cellar	8
Clay	40
Shale	130
Shells	131
Shale	1150
Shale & shells	1500
Sandy shale	1745
Shale & shells	1750
Red bed shale	1995
Lime & shale	2250
Shale sandy	2415
Shale lime	2585
Lime	2677
Lime & shale	3050
Lime	3095
Lime & shale	3157
Lime w/shale breaks	3250
Sandy lime	3260
Lime & shale breaks	3324
Lime w/shale breaks	3406
Shale & lime	3490
Shale	3490
Lime	3704
Shale	3308 TD

Geologist Tops:

Reebner	3541
Lansing	3559
Oil show	3733-45
Base K. G.	3704

Rotary total depth 3305


Set 5 1/2" on bottom w/100 sacks cement. Centralizers at 3775 and 3700.

1st. RT - 3723 to 3750. Open 1 hr. gas to top in 50 min. Recovered 2500' oil. 20 min RT 100m, RT 200 and RT 300.

2nd. RT - 3753 to 70. Open 20 min. quit blowing in 10 min. Recovered 10' rotary mud.

This is to certify that the above information is to the best of my knowledge true and correct.

Subscribed and sworn to before me this 31st day of December, 1953.

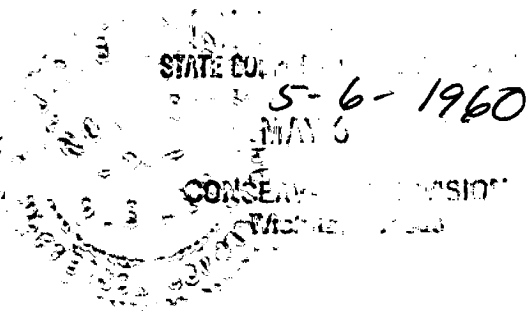

W. C. CAREY CONTRACTOR

By Herbert Photon
Herbert Photon, Superintendent

W. C. Carey
W.C.

My Commission Expires: November 13, 1956.