


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

NORTH

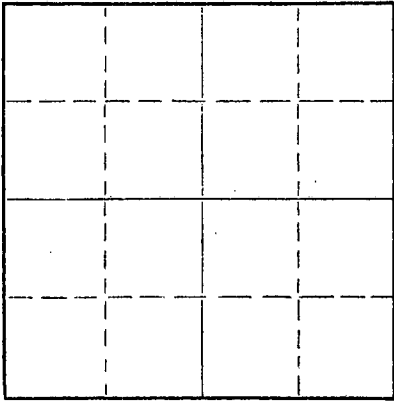

Locate well correctly on above  
Section Plat

Graham County, Sec. 10 Twp. 8 Rge. (E) 24 (W)

Location as "NE/CNW%SW%" or footage from lines CN N/2 NW NW  
Lease Owner Empire Drilling Company  
Lease Name Goff Well No. 1  
Office Address 650 Fourth National Bank Building  
Character of Well (completed as Oil, Gas or Dry Hole) oil  
Date well completed March 15, 1954 19  
Application for plugging filed September 18, 1958 19  
Application for plugging approved September 23, 1958 19  
Plugging commenced October 6, 1958 19  
Plugging completed October 10, 1958 19  
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well A. D. Fabricius  
Producing formation Depth to top Bottom Total Depth of Well 3747 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 3570 feet to Surface feet for each plug set.

Well had previously been plugged back to 3570. Hole filled with sand from 3570 to 3490 (Top perforations at 3500) Four sacks cement placed in bottom of hole with dump bailer; hole filled with mud to 280 feet; ten foot rock bridge installed between 280 and 270 feet and twenty five sacks of cement poured in hole; hole then filled with mud to 40 feet and ten foot rock bridge installed between 30 and 40 feet and hole capped to bottom of cellar with ten sacks of cement.

RECEIVED  
STATE CORPORATION COMMISSION  
OCT 28 1958  
CONSERVATION DIVISION  
WICHITA, KANSAS


(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Barnes and Sons Pipe Plugging Company  
Address Russell, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
I, Dan J. Kornfeld, (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dan J. Kornfeld  
650 Fourth National Bank Building  
(Address)

SUBSCRIBED AND SWORN TO before me this 24th day of October 1958, 19

Charllette Stanley  
Notary Public.



PLUGGING  
FILE SEC 10.18 R 24W  
BOOK PAGE 31 LINE 8