

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

Graham County, Sec. 36 Twp. 8 Rge. 25 (E) (W) X

Location as "NE/CNW/SW" or footage from lines NE NE NE
Lease Owner Petroleum Management Inc.
Lease Name Schemberger Well No. #1
Office Address Box 922 Great Bend, Kansas
Character of Well (completed as Oil Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed 2-23-72 19____
Application for plugging approved _____ 19____
Plugging commenced 4-1-72 19____
Plugging completed 4-8-72 19____
Reason for abandonment of well or producing formation _____

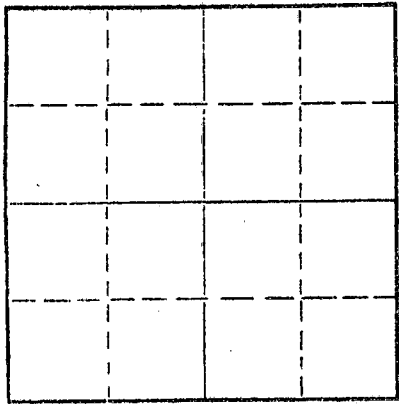

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

Name of Conservation Agent who supervised plugging of this well W. L. Nichols
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4353' Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	3975'	1224.30'
				8 5/8"	215'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded back to 3875' - Mixed and ran 5 sacks cement thru dump bailer.
Squeezed hole with 5 sacks hulls - 10 sacks gel, 100 cu. ft. cement from 1225' to 900',
16 sacks gel from 900' to 260'. 30 cu. ft. cement from 260' to 185'. 4 sacks gel from
185' to 25'. 10 cu. ft. cement from 25' to base of cellar.

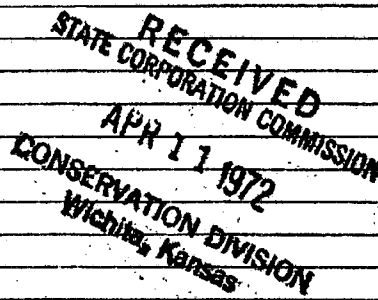


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Southwest Casing Pulling Co.
Address Box 364 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.
Box 364 Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 10 day of April, 19 72



Sidney D. Miller
Notary Public.

My commission expires _____