


15-065-02794-00-01

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

WELL PLUGGING RECORD

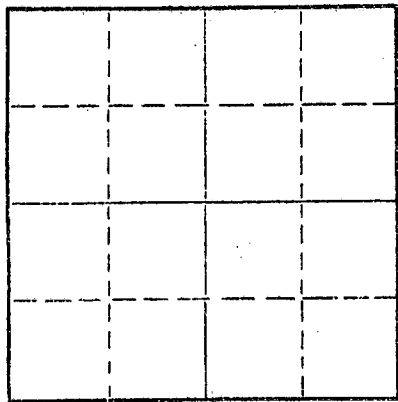

Locate well correctly on above Section Plat

Graham County, Sec. 36 Twp. 8 Rge. 25 (E) (W) X  
Location as "NE/CNW%SW%" or footage from lines SE SE NE  
Lease Owner Petroleum Management Inc.  
Lease Name Bell Well No. #1  
Office Address Box 922 Great Bend, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed 2-28-72 19  
Application for plugging approved 19  
Plugging commenced 4-6-72 19  
Plugging completed 4-8-72 19  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well W. L. Nichols  
Producing formation Depth to top Bottom Total Depth of Well 3980' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	3980'	603.39'
				8 5/8"	243'	1/2

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug with sand to 3775'. Mixed and ran 5 sacks cement thru dump bailer.  
Squeezed hole with 5 sacks hulls and 10 sacks gel and 100 cu. ft. cement from 1225' - 900'. 16 sacks gel from 900' to 260'. 30 cu. ft. cement from 260' to 185'. 4 sacks gel from 185' to 25'. 10 cu. ft. cement from 25' to base of cellar.

RECEIVED  
STATE CORPORATION COMMISSION  
APR 11 1972  
CONSERVATION DIVISION  
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co.  
Address Box 364 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. A. Spencer Sec.  
Box 364 Great Bend, Kansas  
(Address)

Subscribed and Sworn to before me this 10 day of April, 1972

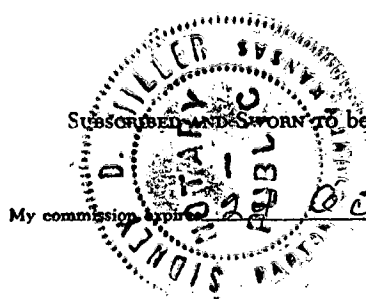

My commission expires October 1972

Sidney J. Miller  
Notary Public.