

15-179-20014-00-00

R


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

Sheridan County, Sec. 3 Twp. 8S Rge. 26 (X) west(w)  
Location as "NE/CNW/SW" or footage from lines C SE SE  
Lease Owner Joe Katz Oil Account  
Lease Name Niblock Well No. "A" #2  
Office Address 7751 Carondelet Avenue, Clayton, Missouri 63105  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed May 20 19 67  
Application for plugging filed May 20 19 67  
Application for plugging approved May 20 19 67  
Plugging commenced May 20, 12:30 a.m. 19 67  
Plugging completed May 20, 2:30 a.m. 19 67  
Reason for abandonment of well or producing formation Dry

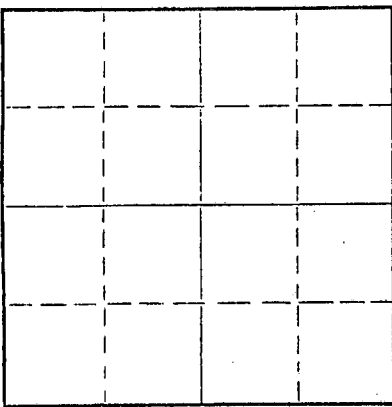

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Bill Nichols, Morland, Kansas  
Producing formation Depth to top Bottom Total Depth of Well 3865 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface	0	226	7"	X	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud to 540', put 15 sacks cement thru open end drillpipe. Filled hole with heavy mud to 215', Halliburton plug with 1/4 sack hulls, 15 sacks cement thru open end drillpipe. Filled hole with heavy mud to 40', Halliburton plug with 1/4 sack hulls and 8 sacks cement. Bridge would Kelly. 2 sacks cement in rat hole.

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 26 1967  
CONSERVATION DIVISION  
Wichita, Kansas

5-26-67


(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Sterling Drilling Company  
Address Box 129, Sterling, Kansas 67579

STATE OF KANSAS, COUNTY OF RICE, ss.  
F. A. Wuellner (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. STERLING DRILLING COMPANY

(Signature) F. A. Wuellner, Secretary  
Box 129, Sterling, Kansas (Address)

Subscribed and sworn to before me this 25th day of May, 19 67



Bernard Laudermilk, Notary Public.

BERNARD LAUDERMILK, Notary Public  
Commission Expires January 22, 1970

STERLING DRILLING COMPANY  
Sterling, Kansas

WELL LOG ----- NIBLOCK "A" #2  
LOCATED: C SE SE Section 3-8S-26W, Sheridan County, Kansas

OWNER: Joe Katz Oil Account  
ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMMENCED: May 11, 1967  
COMPLETED: May 20, 1967

ROTARY TOTAL DEPTH: 3865'

LOG

0 - 160	Sand & Clay
160 - 756	Shale
756 - 1260	Shale, Sand & Lime
1260 - 1985	Sand & Shale
1985 - 2128	Shale
2128 - 2160	Anhydrite
2160 - 2968	Lime & Shale
2968 - 3085	Lime
3085 - 3578	Lime & Shale
3578 - 3697	Lime
3697 - 3770	Lime & Shale
3770 - 3865	Lime T.D.

CASING RECORD

Run 7 joints (215') 7" OD casing, set at 226' K.B. with 150 sacks HA-5. Plug was down at 10:30 p.m. by Howco.

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 26 1967  
5-26-67  
CONSERVATION DIVISION  
Wichita, Kansas

Began plugging at 12:30 a.m. 5-20-67. Plugged as follows: Filled hole with heavy mud to 540', put 15 sacks cement thru open end drillpipe. Filled hole with heavy mud to 215', Halliburton plug with 1/4 sack hulls, 15 sacks cement thru open end drillpipe. Filled hole with mud to 40', Halliburton plug with 1/4 sack hulls and 8 sacks cement. Bridge would hold Kelly. 2 sacks cement in rat hole. Job completed at 2:30 a.m. 5-20-67. State Plugger, Bill Nichols, Morland, Kansas.