

15-179-20041-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Sheridan County. Sec. 32 Twp. 8s Rge. 26w (#) X(W)
Location as "NE/CNW/SWK" or footage from lines App C SW NW

Lease Owner Petroleum, Inc.

Lease Name Sutor 'J' Well No. 1

Office Address Route 2, Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed September 11, 19 67

Application for plugging filed September 11, 19 67

Application for plugging approved September 12, 19 67


Plugging commenced September 11, 19 67

Plugging completed September 11, 19 67

Reason for abandonment of well or producing formation No producible zones

If a producing well is abandoned, date of last production none 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

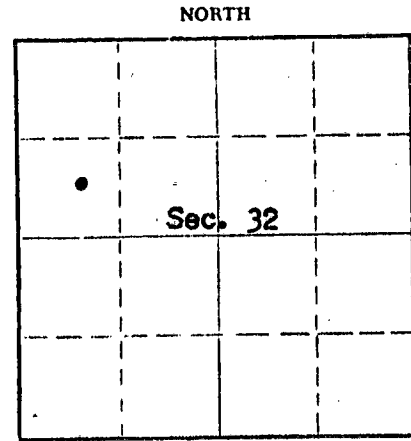

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well W. L. Nichols

Producing formation Depth to top Bottom Total Depth of Well 3765' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	250'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mudded up with heavy mud to 2040', placed 100 sacks cement through drill pipe. Mudded up with heavy mud to 240', followed by wooden plug. Placed 20 sacks cement through drill pipe onto plug. Mudded up with heavy mud to 40' followed by 10 sacks cement to base of well cellar.

RECEIVED
STATE CORPORATION COMMISSION
SEP 20 1967
9-20-1967
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Garvey Drilling Company
Address Route 2, Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton, ss.

Monte Chadd (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. Monte Chadd, Dist. Prod. Supt.

(Signature) [Signature]

Route 2, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 18 day of September, 19 67

My commission expires April 14, 1971
Arthur J. [Signature] Notary Public.

15-179-20041-00-00

WELL LOG

COMPANY Petroleum, Inc.

SEC. 32 T. 8S R. 26W

FARM ~~J~~ Sutor J ^{KCC} _{ZAP} NO. 1


LOC. C SW NW

TOTAL DEPTH 3765'

COUNTY Sheridan

COMM. 9-5-67 COMP. 9-11-67

CONTRACTOR Garvey Drilling Company



CASING 8 5/8" @ 250' w/225' sx

ELEVATION

PRODUCTION D & A

FIGURES INDICATE BOTTOM OF FORMATIONS

- 620' Clay and Sand
- 700' Sand
- 1250' Shale, Clay and Sand
- 1705' Shale and Shells
- 1740' Shale with Pyrite
- 1820' Shale
- 2025' Sand
- 2244' Red Bed and Shale
- 2280' Anhydrite
- 2561' Shale
- 3765' Lime and Shale
- 3765' RTD

RECEIVED
 STATE CORPORATION COMMISSION
 SEP 20 1967
 9-20-1967
 CONSERVATION DIVISION
 Wichita, Kansas

State of Kansas }
 County of Barton } ss

I, Sam N. Stephens of Garvey Drilling Company

upon oath state the above and foregoing is a true and correct copy of the log of the 'J' Sutor No. 1 well.

Sam N. Stephens

Subscribed and sworn to before me this 15th day of September 1967

My Commission Expires: November 5th, 1969

Richard L. Boye
 NOTARY PUBLIC

