


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

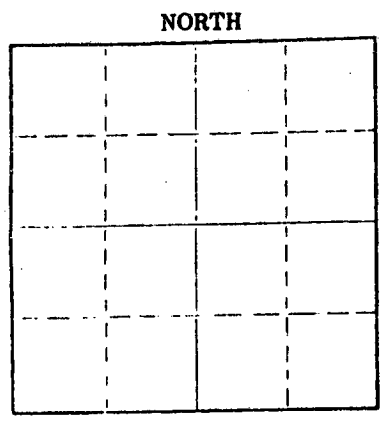

Locate well correctly on above Section Plat

Sheridan County, Sec. 32 Twp 8 Rge 26 (E) W (W)
SE SE NE
Location as "NE/CNW/SE" or footage from lines
Lease Owner Dreiling Oil, Inc.
Lease Name Hoxie State Bank Well No. 1
Office Address Rt. #1, Box 28, Victoria, KS 67671
Character of Well (completed as Oil, Gas or Dry Hole) Oil Well
Date well completed 10-3 1975
Application for plugging filed 10-20 1975
Application for plugging approved 10-22 1975
Plugging commenced 10-31 1975
Plugging completed 10-31 1975
Reason for abandonment of well or producing formation Dry Hole - No Production

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor, Box 9, Rt. 1, Palco, KS 67657
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3,870 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Pipe				8 5/8"	175'	0'
Casing				4 1/2"	3,863'	1,706'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged with 1 sack hulls, 80 sacks cement, 13 Gel, 1 plug, 50 sacks cement
600# pumping pressure, 500# shut in pressure

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Dreiling Oil, Inc.
Address Rt. #1, Box 28, Victoria, KS 67671

STATE OF KANSAS COUNTY OF ELLIS ss.
I, Joseph A. Hess, Sec. Treas. of Drlg. Contg. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Joseph A. Hess
JOSEPH A. HESS, HAYS, KS 67601
(Address)

Subscribed and Sworn to before me this 5th day of November, 19 75

September 13, 1976
Cecilia Basgall Notary Public.



RECEIVED
STATE CORPORATION COMMISSION
NOV 6 1975
11-6-1975
CONSERVATION DIVISION
Wichita, Kansas

15-179-20411-00-00

DREILING OIL, INC.

Victoria, Kansas 67671

WELL LOG

Company	Dreiling Oil, Inc. Rt. #1 - Box 28 Victoria, KS 67671	Sec. 32	Twp. 8	Rng. 26W
Farm	Hoxie State Bank No. 1	Location	SE SE NE	
Total Depth	3,870'	County	Sheridan	
Comm.	9-26-75	Comp.	10-3-75	Elevation: 2522 K. B.
Contractor	Dreiling Oil, Inc. Rt. #1 - Box 28 Hays, KS 67671		2519	D. F.
			2517	G. R.

Casing Record
 175' - 8 5/8"
 3,863' - 4 1/2"

Cement Record
 150 sacks cement
 cemented w/125 sacks common
 cement


Production:
 2519 D. F.
 2517 G. R.

Figures Indicate Bottom of Formations

0'	90'	Sand & Gravel
90'	685'	Shale
685'	1600'	Shale & Sand
1600'	1720'	Shale
1720'	1890'	Sand
1890'	2112'	Red Bed & Shale
2112'	2150'	Anhydrite
2150'	2540'	Shale
2540'	3190'	Shale & Lime
3190'	3568'	Shale
3568'	3682'	Shale & Lime
3682'	3870'	Lime
3870'	T.D.	

STATE OF KANSAS)
)ss
 COUNTY OF ELLIS)

I, Joseph A. Hess, Secretary Treasurer of Dreiling Oil, Inc., upon oath states that the above and foregoing is a true and correct copy from the Daily Drilling Report from the Hoxie State Bank #1.


 JOSEPH A. HESS

Subscribed and sworn to before me this 9th day of October, 1975.


 Cecilia Basgall
 Notary Public

My commission expires: September 13, 1976.

10-21-1975