


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Sheridan County, Sec. 35 Twp. 8S Rge. 29 (E) W (W)

Location as "NE/CNW/SW" or footage from lines SW SE SE
Lease Owner Rock Island Oil & Refining Company, Inc.
Lease Name Pratt "B" Well No. 1
Office Address 321 West Douglas - Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) D & A
Date well completed April 14 19 68
Application for plugging filed April 14 19 68
Application for plugging approved April 14 19 68
Plugging commenced April 14 19 68
Plugging completed April 14 19 68
Reason for abandonment of well or producing formation D & A

NORTH



Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W.L. Nichols
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4170 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	220'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set Plug @ 1400' cemented with/100 sx, set #2 plug @240', cem with 20 sx, set top plug @ 40' cem with 10 sx, cem rat hole w/5 sx

RECEIVED
STATE CORPORATION COMMISSION
APR 22 1968
CONSERVATION DIVISION
Wichita, Kansas

4/22/68


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Red Tiger Drilling Company
Address 1720 Wichita Plaza - Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Harold R. Martin (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Harold R. Martin
1720 Wichita Plaza - Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 16th day of April, 19 68

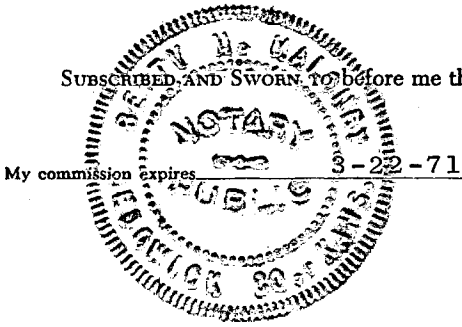

Betty M. Maloney
Notary Public.

15-179-20094-00-00

DRILLERS LOG

Pratt "B" No. 1

CASING RECORD:	COMPANY:	Rock Island Oil & Refining Company, Inc.	DESCRIPTION:
8 5/8" @ 320' w/190 sx cement	CONTRACTOR:	Red Tiger Drilling Company	SW SE SE 35-85-29W Sheridan Co., Kansas
TOTAL DEPTH: 4170'	COMMENCED:	April 4, 1968	ELEVATION:
	COMPLETED:	April 14, 1968	

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Shale & Sand Streaks	0	222	
Shale	222	1495	
Shale & Shells	1485	1990	
Anhydrite, Lime, Blaine	1990	2015	
Shale & Shells	2015	2417	
Anhydrite	2417	2453	
Red Bed & Shale	2453	2695	
Shale & Lime	2695	3320	
Lime	3320	3425	
Lime & Shale	3425	3495	
Lime	3495	3660	
Lime and Shale	3660	3829	
Lime	3829	4170	

RECEIVED
STATE CORPORATION COMMISSION
APR 22 1968
CONSERVATION DIVISION
Wichita, Kansas

4/22/68

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Harold R. Martin
Harold R. Martin

Subscribed and sworn to before me this 16th day of April, 1968.

Betty M. Maloney
Notary Public

My Commission Expires: _____
1968