


15-193-20010-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

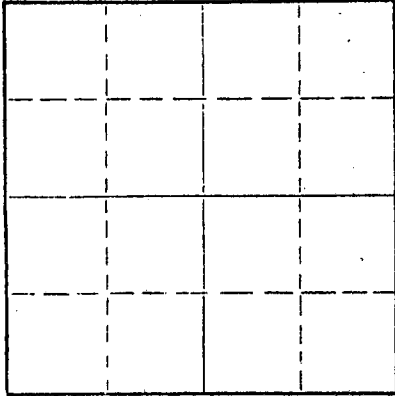

Locate well correctly on above
Section Plat

Thomas County, Sec. 28 Twp. 8 Rge. 32 (E) (W) X
Location as "NE/CNWxSWx" or footage from lines C/SW/NE
Lease Owner Donald C. Slawson
Lease Name BOEGER "A" Well No. 1
Office Address 408 One Twenty Bldg.
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19__
Application for plugging filed August 2, 19 73
Application for plugging approved 19__
Plugging commenced October 8, 19 73
Plugging completed November 16, 19 73
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production 19__
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4690 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	451	0
				4 1/2	4689	1517.71'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.


Dumped sand to 4500' and 5 sacks cement. Shot casing at 1800, 1600 and 1500'. Pulled 48 joints of 4 1/2" casing. Allied plugged well with 5 sacks hulls, 13 sacks gel and 110 sacks cement at 1875 to 1550', followed with 27 sacks gel and 30 sacks cement at 470 to 400'. Released plug and pumped 9 sacks gel and 10 sacks cement from 40' to surface.

RECEIVED
STATE CORPORATION COMMISSION
NOV 21 1973
CONSERVATION DIVISION
Wichita, Kansas

11/21/73

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Rockhold Eng., Inc.
Address Box 698 Great Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Barton, ss.
James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

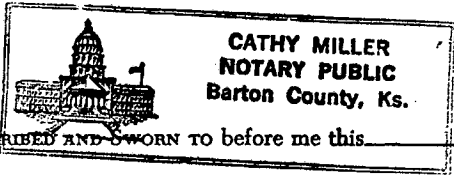

(Signature) James W. Rockhold
Box 698 Gt. Bend, Ks. 67530 James W. Rockhold
(Address)

SUBSCRIBED AND SWORN TO before me this 19th day of November, 1973

Cathy Miller
Cathy Miller Notary Public.

My commission expires 9/30/75

