

15-193-20006-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

P. O. Box 17027
Wichita, Kansas 67217
NORTH

Thomas County, Sec. 34 Twp. 34 Rge. 32 (E) (W)
Location as "NE/CNW/SW4" or footage from lines C NW NE
Lease Owner Pickrell Drilling Company
Lease Name Basting #1 Well No.
Office Address Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 10-18 1968
Application for plugging filed 11-25 1974
Application for plugging approved 11-26 1974
Plugging commenced 11/25/74 19
Plugging completed 12/11/74 19
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 9-30 1974
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Massey
Producing formation LKC - Miss. Depth to top 4087 Bottom 4678 Total Depth of Well 4678 Feet
Show depth and thickness of all water, oil and gas formations.

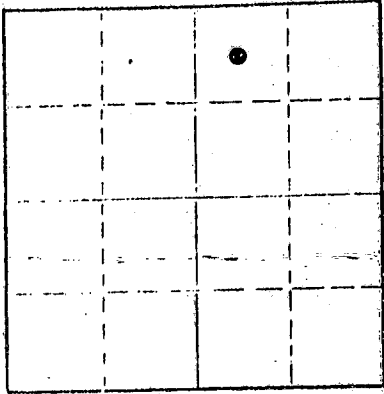

Locate well correctly on above Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|------|--------|--------|------------|
| L-KC | OIL | 4087 | 4360 | 8-5/8 | 364 | none |
| Miss. | OIL | 4650 | 4678 | 5 1/2" | 4420 | 1921' |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole, pushed plug to 4000', ran sand and dumped 4 sacks cement.
Shot pipe at 3301', 2220', 2026', 1929', pulled 60 joints. Pumped 3 sacks hulls, 35 sacks gel and 120 sacks poz mix.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION

JAN 3 1975

1-3-75

CONSERVATION DIVISION

RECEIVED
STATE CORPORATION COMMISSION

DEC 27 1974

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KELSO CASING PULLING
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE


R. DARRELL KELSO (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso
CHASE, KANSAS
(Address)

Subscribed and Sworn to before me this 20th day of December, 1974

Margaret Melcher
Notary Public.

My commission expires



15-193-20006-00-00

ROTARY DRILLING LOG

Operator: Rains & Williamson Oil
Co., Inc.
BASTIN #1
NW NE 34-8S-32W
Thomas County, Kansas

Contractor: Rains & Williamson
Oil Co., Inc.
Commenced: 9-27-68
Completed: 10-11-68 (Rotary)

Remarks: Set 8-5/8" casing at
364' w/175 sacks GL-3.

Set 5-1/2" casing at
4420' w/150 sacks cmt.

Formations

| | |
|--------------------|-------|
| Surface clay | 40' |
| Sand and Shale | 260' |
| Shale | 2500' |
| Red Bed | 2694' |
| Anhydrite | 2723' |
| Shale | 3180' |
| Shale and Lime | 3590' |
| Lime and Shale | 4082' |
| Lime | 4383' |
| Lime and Shale | 4420' |
| Lime | 4678' |
| Rotary Total Depth | 4678' |

RECEIVED
STATE CORPORATION COMMISSION
OCT 16 1973
CONSERVATION DIVISION
Wichita, Kansas

10-16-73

We certify the above log is
true and correct to the best
of our knowledge and belief.

RAINS & WILLIAMSON OIL CO., INC.

Wilson Rains
Wilson Rains

Subscribed and sworn to before me, a Notary Public within and for the
State of Kansas, County of Sedgwick, this 14th day of October, 1968.

Sherry Gish
Sherry Gish Notary Public

My Commission Expires:
June 30, 1968

