

15-193-20018-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Thomas County, Sec. 34 Twp. 8S Rge. (E) 32 (W)

Location as "NE/CNW/SW" or footage from lines C NE SE

Lease Owner Rains & Williamson Oil Co., Inc.

Lease Name SOWERS Well No. 1

Office Address 1425 Wichita Plaza - Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 6-11 19 69

Application for plugging filed 6-11 19 69

Application for plugging approved 6-11 19 69

Plugging commenced 6-11 19 69

Plugging completed 7:15 PM 6-11 19 69

Reason for abandonment of well or producing formation No oil or gas found in commercial quantities.

If a producing well is abandoned, date of last production -- 19 --

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Bill Nichols, Morland, Kansas

Producing formation None Depth to top Bottom Total Depth of Well 4370 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	348'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with mud. Set bottom plug at 1850' with 100 sacks cement. Set top plug at 395' with 25 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
JUN 19 1969
CONSERVATION DIVISION
Wichita, Kansas

6-19-69

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rains & Williamson Oil Co., Inc.


Address 1425 Wichita Plaza - Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss. Wilson Rains (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wilson Rains Wilson Rains
1425 Wichita Plaza - Wichita, Kansas (Address)

18 June 69

Sherry Gish Notary Public.



6-30-71

15-193-20018-00-00

ROTARY DRILLING LOG

Operator: Rains & Williamson
Oil Co., Inc.
SOWERS #1
C NE SE 34-8S-32W
Thomas Co., Kansas

Contractor: Rains & Williamson
Oil Co., Inc.
Commenced: 6-3-69
Completed: 6-11-69
Casing: 8-5/8/348'/185 sx.

Formations

Top Soil	90'
Sand	140'
Sand and Shale	358'
Shale	446'
Shale and Shells	2185'
Sand and Shale	2222'
Shale and Shells	2301'
Shale and Lime Streaks	2575'
Shale and Lime	2674'
Anhydrite	2703'
Shale and Lime Shells	3120'
Shale and Lime	3533'
Lime and Shale	4092'
Lime	4370'
Rotary Total Depth (D&A)	4370'

COPIES OF THIS LOG
MADE BY
JUN 11 1969

We certify the above log is true and correct, to the best of our knowledge and belief.

RAINS & WILLIAMSON OIL CO., INC.


Wilson Rains

Wilson Rains

Subscribed and sworn to before me, a Notary Public within and for the State of Kansas, County of Sedgwick, this 18 day of June, 1969.

Sherry Gish

Sherry Gish Notary Public

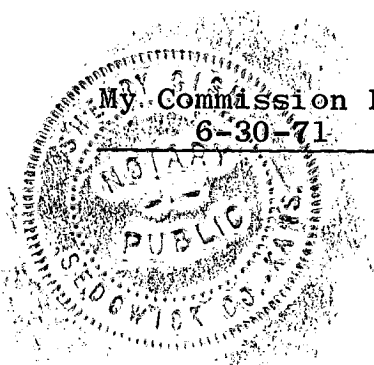

Faint, illegible text at the top left of the page.

Faint, illegible text at the top right of the page.

RECEIVED
STATE CORPORATION COMMISSION
JUN 19 1969
CONSERVATION DIVISION
Wichita, Kansas

STATE
Faint, illegible text in the middle right section of the page.

Faint, illegible text below the middle right section.

