

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-20733-00-00
Spot: SESESW Sec/Twnshp/Rge: 18-21S-13W
330 feet from S Section Line, 2970 feet from E Section Line
Lease Name: BROWN LAWRENCE Well #: 1
County: STAFFORD Total Vertical Depth: 3675 feet

Operator License No.: 4058
Op Name: AMERICAN WARRIOR, INC.
Address: PO BOX 399
GARDEN CITY, KS 67846

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		3360		WITH 2 SX CMT
PROD	5.5	3672	0	WITH 125 SX CMT 119.44
SURF	8.625	266		WITH 235 SX CMT

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 04/30/2008 8:30 AM
Plug Co. License No.: 6123 Plug Co. Name: CHASE WELL SERVICE, INC.
Proposal Rcvd. from: DALE SCHNEIDER Company: CHASE WELL SERVICE, INC. Phone: (620) 793-9556

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING.

Plugging Proposal Received By: LINDLEY REIMER Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 04/30/2008 10:00 AM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

IN 2004 CASING LEAK SQUEEZED AT 3408 CIBP @ 3360' WITH 2 SX CMT ON TOP OF CIBP. PERFORATE 5 1/2" CASING AT 800'. RUN 2 3/8" TBG INTO 800'. PUMPED DOWN TBG WITH 100 SX CMT. CIRCULATED CMT TO PIT OUT 2 3/8"/5 1/2" ANNULUS. DID NOT GET RETURNS OR BLOW UP 5 1/2" X 8 5/8" ANNULUS. LAY TBG DOWN. PRESSURE UP ON 5 1/2" CASING TO 600# & HELD. (COULD NOT PUMP THROUGH PERFS) TIED ONTO 5 1/2"/8 5/8" ANNULUS. PRESSURED UP IMMEDIATELY TO 600#. SUSPECT WELL BEEN SQUEEZED UP HIGH AT SOMETIME (OLD CONNECTIONS CHANGED OUT OF BRADEN HEAD SHOWED OLD CMT IN THEM.)

Perfs:

Top	Bot	Thru	Comments
3672	3675		

RECEIVED
13 2008
KCC WICHITA
RECEIVED
MAY 13 2008
KCC WICHITA


INVOICED

DATE 5-20-08
INV. NO. 2008061736

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: TBG

District: 01

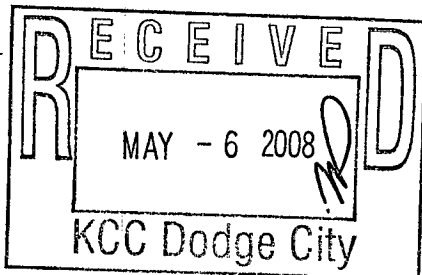

Signed

Stephen J. Pfeifer
(TECHNICIAN)