


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

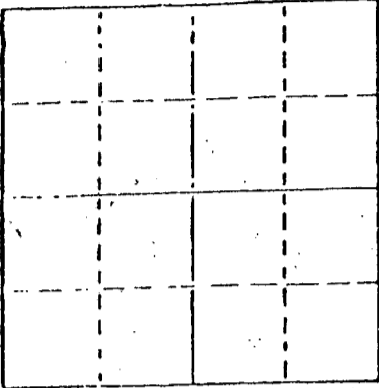

Locate well correctly on above
Section Plat

SE Sedgwick County. Sec. 11 Twp. 26 Rge. 2E E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
1650' FSL 1350' FEI
Lease Owner A.C. & W.K. Teichgraeber Oil Company
Lease Name Coy Burge Well No. 3
Office Address Box 645, El Dorado, Kansas 67042
Character of Well (Completed as Oil, Gas or Dry Hole)
Dry

Date Well completed 4/1 1982
Application for plugging filed 4/1 1982
Application for plugging approved 4/1 1982
Plugging commenced 4/1 1982
Plugging completed 4/1 1982
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Don Thompson
Producing formation Depth to top Bottom Total Depth of Well 2900'
Show depth and thickness of all water, oil and gas formations.

3897
AUG
ecc

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface	0	198.45'	8"	198.45'	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug 30 sacks cement @ 220'
12 sacks cement @ 40'
5 sacks cement in rathole

RECEIVED
STATE CORPORATION COMMISSION
4-9-82
APR - 9 1982
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor EDCO Drilling Company, Inc.

STATE OF Kansas COUNTY OF Butler, ss.


(employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) A.C. Teichgraeber
Box 645, El Dorado, KS 67042
(Address)

SUBSCRIBED AND SWORN TO before me this day of 19

Notary Public.

My commission expires



EDCO Drilling Company, Inc.

124 WEST LOCUST — P.O. BOX 645 — EL DORADO, KANSAS 67042

April 5, 1982

To: A.C. & W.K. Teichgraeber Oil Company
Box 645
El Dorado, Kansas 67042

Lease: Coy Burge #3

Location: Sec. 11, Twp. 26, Rge. 2E
Sedgwick County

Drilling Dates: March 26 thru April 1, 1982

RECEIVED
STATE CORPORATION COMMISSION

APR - 9 1982

CONSERVATION DIVISION
Wichita, Kansas

Drilling Log

Surface T.D. 205'
Surface Set 198.45' of 8" Surface casing
Cemented by United 125 sacks cement 3% c.c.

155 - 210'	Cement
210 - 353'	Shale w/Lime Streaks
353 - 840'	Shale w/Lime Streaks
840 - 1300'	Shale w/Lime Streaks
1300 - 1655'	Shale w/Lime Streaks
1655 - 1980'	Lime & Shale
1980 - 2315'	Lime & Shale
2315 - 2407'	Lime w/Shale Streaks
2407 - 2460'	Kansas City Lime
2460 - 2660'	Lime & Shale
2660 - 2835'	Lime & Shale
2835 - 2891'	Lime w/Shale Streaks
2891 - 2900'	Lime w/Shale Streaks
2900'	T.D.