


15-173-01994-00-00



STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Sedgwick County. Sec. 11 Twp. 26S Rge. 2 (E) 1/W

Location as "NE/CNW/SW" or footage from lines SW NE SE  
Lease Owner Murfin Drilling Co.  
Lease Name Weiskirch Well No. 4  
Office Address 617 Union Center, Wichita 2, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) oil  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed 11-23 1962  
Application for plugging approved 11-26 1962  
Plugging commenced 12-4 1962  
Plugging completed 12-6 1962  
Reason for abandonment of well or producing formation low production

NORTH

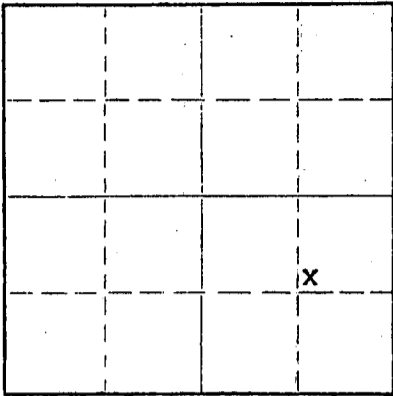

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Paul Turpin  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 2872 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	84'	cemented
				5 1/2	2868	2343.25

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole to 2870 & dumped 5 sacks cement with bailer  
Set 10 foot rock bridge at 140 feet, dumped 25 sacks cement.  
Mud hole to 30 feet, set 5 foot rock bridge  
Dumped 8 sacks cement.

RECEIVED  
STATE CORPORATION COMMISSION  
DEC 12 1962  
12-12-62  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Kent Well Servicing Co., Inc.  
Address Box 470, El Dorado, Kansas

STATE OF Kansas, COUNTY OF Butler, ss.  
\_\_\_\_\_  
(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) May Payne

(Address)

SUBSCRIBED AND SWORN TO before me this 10th day of December

Esther E. Phillips

My commission expires Jan 18, 1963



# WELL LOG

9

COMPANY **Murfin Drilling Company**

SEC. **11** T. **26S** R. **2E**

FARM **Weiskirch** NO. **4**

LOC. **SW NE SE**

TOTAL DEPTH **2872'**


COUNTY **Sedgwick**  
KANSAS

COMM. **6-3-55**

COMP. **6-10-55**

SHOT OR TREATED

CONTRACTOR **Murfin Drilling Company**



ISSUED

### CASING

20	10
15	8 5/8" @ 85 w/75 sx.
12	6
13	5 1/2" @ 2868' w/75 sx.
	4 1/2"

ELEVATION **1357 RB**

PRODUCTION **25 bopd**

FIGURES INDICATE BOTTOM OF FORMATIONS

85	Lime
225	Lime & shells
555	Lime
815	Lime & shale
1280	Shale & shells
1549	Shale & lime streaks
1745	Shale & shells
2005	Shale
2515	Shale & lime
2600	Lime & shale
2819	Shale & lime
2861	Lime
2872	Lime (Miss)
2872	T. D.

### TOPS:

Kansas City Line	2389
Mississippi Lime	2827
Mississippi Chat	2867
RTD	2872

### DST #1 - 2866-72

Open 1 hr.; weak blow at start of test but increased to good steady blow throughout most of test. Rec. 300' gas, 53' clean free oil, 20' oil cut mud, 80' muddy water BHP 700# in 20 min.  
IFP Off  
FFP Off.

RECEIVED  
STATE CORPORATION COMMISSION

FEB 14 1963

CONSERVATION DIVISION  
Wichita, Kansas

State of Kansas }  
County of Sedgwick } SS:

I, W. R. Murfin of the Murfin Drilling Company

upon oath state that the above and foregoing is a true and correct copy of the log of the Weiskirch #4 well.

Subscribed and sworn to before me this 3rd day of August 19 55

My Commission Expires June 14, 1964

My Commission Expires: 6-13-59

Fred Murfin  
By am

May Faye Blum  
NOTARY PUBLIC

