


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH

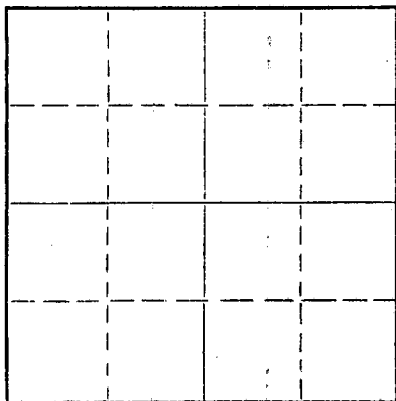

Locate well correctly on above Section Plat

Sedgwick County, Sec. 11 Twp. 26S Rge. 2 (E) (W)
Location as "NE/CNW/SW" or footage from lines NW - SW - SW
Lease Owner Winne Oil Company
Lease Name Erdwien AUB KCC ~~Wardwin~~ Well No. 1
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19____
Application for plugging filed 19____
Application for plugging approved 19____
Plugging commenced 8-27 1957
Plugging completed 8-30 1957
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	200	None
				4 1/2	3223	2403.80

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

4 1/2" pipe set @ 3223 - cement drilled out to 3193 - Lane Wells plug set @ 2820 - pulled pipe - mudded hole to 185' - set 10' rock bridge - dumped 15 sks cement - mudded hole - set rock bridge - dumped 5 sks cement to base of cellar.

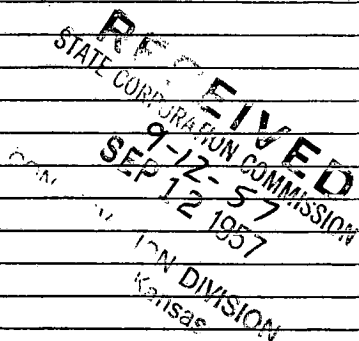

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor R & D Casing Pulling Company License # 236
Address Box 569 Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Warren R. Winne (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Warren R. Winne

3856 N. Oliver (Address)

SUBSCRIBED AND SWORN to before me this 10th day of September, 1957

Perry A. Reed Notary Public.



PLUGGING
FILE SEC. 11 T. 26 R. 2 E.
BOOK PAGE 40 LINE 35

Company - Winne Oil Company, Inc
Farm - Erdwien # 1

Sec. 11 T.26S R. 3E

NW SW SW

Total Depth. 3225' P.B. 2820
Comm 6-16-57 Comp. 6-27-57
Shot - 18 holes 3177 60 3174
31 holes 2880 to 2511
Contractor Winne Oil Company, Inc

County-Sedgwick
Kansas

Casing
8 5/8" 200' 4 1/2" 3223'
with 100 sacks with 150 sacks

Elevation - 1376 RB

Figures indicate bottom of formation

Shale	69
Lime & Shale	100
Shale & Lime	250
Lime	485
Lime & Shale	800
Shells & Shale	1185
Shale & Lime	1340
Lime & Shale	1665
Lime	1825
Lime & Shale	2220
Lime	2570
Lime & Shale	2665
Shale & Shells	2800
Lime & Shale	2880
Lime & Chert	2890
Lime	3060
Shale	3225
Total Depth	

Tops	
Kansas City	2412
Pennsylvanian	
Basal Conglomerate	2843
Mississippi	2849
Miss. Chert Zone	2853
Kinderhook Shale	3098
Misener Sand.	3178 - 1802
Viola	3179

STATE CORPORATION

AUG 27 1957

CONSERVATION DIVISION
Topeka, Kansas

PLUGGING			
FILE	SEC.	T.26	R.2E
BOOK	PAGE	40	LINE 35