


15-173-03013-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

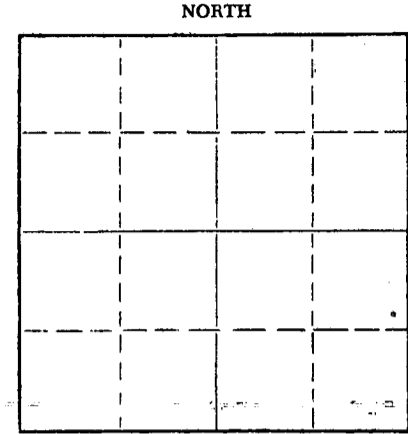

Locate well correctly on above
Section Plat

Sedgwick County. Sec. 11 Twp. 26 Rge. 2 (E) 1/4
Location as "NE/CNW/SW" or footage from lines SE-NE-SE
Lease Owner Murfin Drilling Company
Lease Name Weiskirk Well No. 8
Office Address 617 Union Center Wichita,
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 11-13 1957
Application for plugging filed 6-12 1961
Application for plugging approved 6-12 1961
Plugging commenced 6-13 1961
Plugging completed 6-17- 1961
Reason for abandonment of well or producing formation Low production

If a producing well is abandoned, date of last production 5-25 1961
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Lee Guthrie
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2870 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	155	None
				5 1/2	2864	2463.13

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Hole filled with gravel to 2860-ft.
Dumped 5 sacks cement.
Set 20 ft. rock bridge at 180 ft.
Dumped 15 sacks cement on bridge.
Hole filled with mud to 35 ft.
Set 5 ft. rock bridge at 35 ft. with 10 sacks cement on bridge.
Cap welded over top of surface casing.

RECEIVED
STATE CORPORATION COMMISSION
6-28-61
JUN 28 1961

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Kent Well Servicing Co., Inc.
Address Drawer 470 El Dorado, Kansas

STATE OF Kansas COUNTY OF Butler, ss.
(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dale R. Daniel

SUBSCRIBED AND SWORN to before me this 27th day of June

(Address)

Erskine C. Phillips
Notary Public
Butler, Kansas

My commission expires June 18, 1963

INVOICED
DATE 6-28-61
INV. NO. 3800 E

WELL LOG

R

COMPANY **Murfin Drilling Company**

SEC. 11 T. 26S R. 2E

FARM **WEISKIRCH** NO. **8**

LOC. **SE NE SE**

weiskirch
AUG
KCC

TOTAL DEPTH

2870'

COUNTRY

**Sedgwick
KANSAS**

COMM.


October 7, 1957 COMP. **October 13, 1957**

SHOT OR TREATED

CONTRACTOR

O. S. Sutton & Sons Drilling Company

ISSUED



CASING

30

10

15

5/8" 155' with 110 sacks cement

ELEVATION **1358' KB**

12

6

13

1/2" 2864' with 50 sacks cement

PRODUCTION **25 Bbl. oil per day.**

FIGURES INDICATE BOTTOM OF FORMATIONS

**65' Surface - Shale
720' Lime Shale
1150' Shale & Shells
1320' Lime & Shale
1360' Sand
2870' Lime & Shale
2870' RTD**

ELECTRIC LOG TOPS:

Lansing	2180'	-822
Kansas City/Lansing	2384'	-1026
Base/Kansas City	2546'	-1188
Conglomerate	2811'	-1453
Mississippi	2830'	-1472
Chat	2866'	-1508
RTD	2870'	-1512

DST - NONE

CORE - NONE

RECEIVED
STATE CORPORATION COMMISSION

APR 5 1962

CONSERVATION DIVISION
Wichita, Kansas

State of **Kansas**

County of **Sedgwick**

I, **Fred Murfin** of the **Murfin Drilling** Company

upon oath depose that the above and foregoing is a true and correct copy of the log of the **Weiskirch #8** well.

Subscribed and sworn to before me this **6th** day of **June** 19**61**

My Commission Expires: **June 14, 1964**

[Signature]
[Signature]
NOTARY PUBLIC