

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

Sedgwick County, Sec. 11 Twp. 26 Rge. 2 (E) ~~XXXX~~

Location as "NE/CNW%SW%" or footage from lines SE SE SE

Lease Owner Murfin Drilling Company

Lease Name Weiskirch Well No. 7

Office Address 617 Union Center, Wichita 2, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed January 3 19 57

Application for plugging filed April 2 19 59

Application for plugging approved April 3 19 59


Plugging commenced April 3 19 59

Plugging completed April 5 19 59

Reason for abandonment of well or producing formation Producing formation ran dry.

If a producing well is abandoned, date of last production March 31 19 59

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

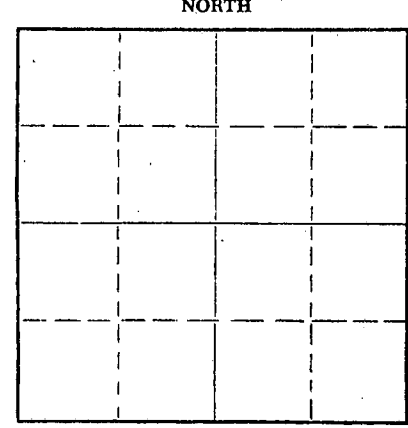

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Lee Guthrie, Leon, Kansas

Producing formation Mississippi Chat Depth to top 2885 Bottom 2889 Total Depth of Well 2889 Feet

Show depth and thickness of all water, oil and gas formations. 2894 ANB KC

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	108'	None
				5 1/2"	2883'	1959'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plug off bottom with 5 sx. cement. Pull casing. Filled hole with mud to 170'. Set 10' rock bridge. Mix and dump 25 sxs. cement. Filled hole with mud to 35'. Set 5' rock bridge. Mix and put in 10 sx. cement. Fill to base of cellar. Cut off and weld on cap.

RECEIVED
STATE CORPORATION COMMISSION
4-21-59
APR 21 1959

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Ace Pipe Pulling Company
Address P. O. Box 304, Great Bend, Kansas

STATE OF Kansas COUNTY OF Sedgwick, ss.
W. R. Murfin (employee or owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. R. Murfin

617 Union Center, Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 20th day of April, 19 59

March 23, 1960

Notary Public.



PLUGGING
FILE SEC. 11 T. 26 R. 2E
BOOK PAGE 27 LINE 22