


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

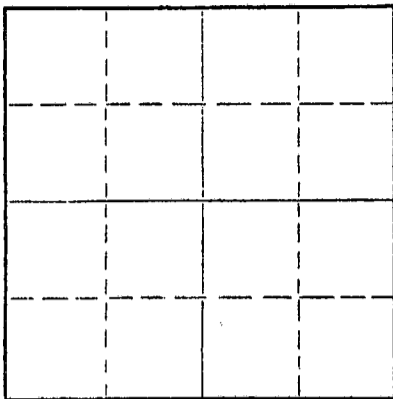

Locate well correctly on above Section Flat

Sheridan County, Sec. 4 Twp. 8 Rge. 30 (E) W (W)
Location as "NE/CNW*SW*" or footage from lines SE SE NW
Lease Owner Shields Oil Producers, Inc.
Lease Name Kennedy Well No. 1
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed July 31 19 70
Application for plugging filed July 31 19 70
Application for plugging approved July 31 19 70
Plugging commenced July 31 19 70
Plugging completed July 31 19 70
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Bill Nicholson
Producing formation Depth to top Bottom Total Depth of Well 4,320 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	322'	Cmtd w/ 170 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Fill hole w/ heavy mud
Set bridge plug @ 1,750'
Pump 100 sax cement on plug thru 4 1/2" drill pipe
Fill hole w/ heavy mud
Set bridge plug @ 340'
Pump 25 sax cement on plug thru 4 1/2" drill pipe
Fill hole w/ heavy mud
Set bridge plug @ 40' w/ 1/2 sax hulls on plug
Dump 10 sax cement on plug to cellar

RECEIVED
STATE CORPORATION COMMISSION
AUG 27 1970
CONSERVATION DIVISION
Wichita, Kansas
08-27-1970

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Shields Drilling Company, Inc.
Address Shields Building, Russell, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.
R. J. Shields (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. J. Shields
Shields Building, Russell, Kansas
(Address)

Subscribed and sworn to before me this 24th day of August, 1970

My commission expires May 26, 1971
Lutz Phillips
Notary Public.





Shields


Russell, Kansas

WELL LOG

15-179-20260-00-00

Operator: Shields Oil Producers, Inc.
 Well: Kennedy #1
 Commenced: July 24, 1970
 Completed: July 31, 1970
 Contractor: Shields Drilling Co., Inc.

Well Description: SE SE NW
 Sec. 4-8s-30w
 Sheridan Co., Kansas



CASING RECORD

Size	Run	Pulled
8 5/8"	322'	Cmtd w/ 170 sax

Elevation: 2,958' RB

Treatment:

Production: D & A

Tops: Heebner 4,028'
 Toronto 4,052'
 Lansing-KC 4,067'

..... Figures Indicate Bottom of Formations

Surface soil, shale & sand	325'
Shale & shells	1,170'
Shale & sand	2,070'
Shale & shells	2,525'
Shale & Redbed	2,663'
Anhydrite	2,701'
Shale	2,710'
Shale & shells	3,010'
Shale & lime	3,495'
Lime	4,320' RTD

RECEIVED
 STATE CORPORATION COMMISSION
 AUG 27 1970
 CONSERVATION DIVISION
 Wichita, Kansas

Notes