

STATE OF KANSAS  
STATE CORPORATION COMMISSION

15-179-20531-00-00

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Sheridan County, Sec. 11 Twp. 8S Rge. 30W E/W  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines

435' FNL ; 435' FEL SE $\frac{1}{4}$ /105' SW of NE $\frac{1}{4}$ SW $\frac{1}{4}$

Lease Owner Chapman Exploration, Inc.  
Lease Name TILLMA Well No. 1

Office Address 404 Cities Service Bldg., Tulsa, Oklahoma  
Character of Well (Completed as Oil, Gas or Dry Hole) 74119  
Dry hole


Date Well completed 4-13 1979  
Application for plugging filed 4-17 1979  
Application for plugging approved 4-18 1979  
Plugging commenced 5-14 1979  
Plugging completed 5-14 1979

Reason for abandonment of well or producing formation  
Dry hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor  
Producing formation Niobrara Depth to top 518' Bottom 1020' Total Depth of Well 1100'  
Show depth and thickness of all water, oil and gas formations.

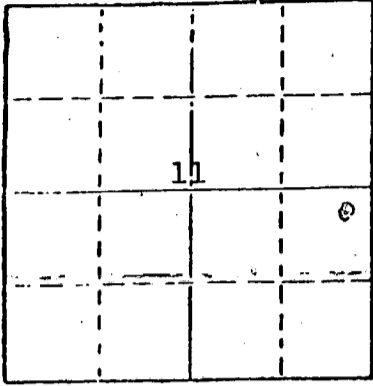

Locate well correctly on above Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Niobrara	Dry	518'	530'	8-5/8"	321'	None
"	"	885'	892'	4-1/2"	1099'	None
"	"	1010'	1020'			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

At perforations 1010'-20', set Baker "P" plug at 1002' with 2 sacks cement on plug.

At perforations 885'-892', set Baker "P" plug at 555' with 2 sacks cement on plug.

Perforations 518'-530', pumped 1 sack cotton seed hulls ahead of cement. Started 75 sacks 50-50 Poz. cement, 6% gel, 1/4 lb. Flocele per sack. Pipe filled with 30 sacks with 1100 # pressure.

Cut off head and filled surface with cement and welded cap on hole.

RECEIVED  
STATE CORPORATION COMMISSION  
05-30-79

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Hallibuton Services, Oberlin, Kansas


CONSERVATION DIVISION  
Wichita, Kansas

STATE OF Kansas COUNTY OF Barton, ss.  
Fred M. Sovereign (employee of owner) or ~~owner~~

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Fred M. Sovereign  
P. O. Box 65, Great Bend, Kansas 67530  
(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of May, 1979

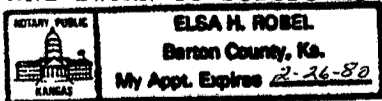

Elsa H. Robel  
Elsa H. Robel Notary Public.

My commission expires February 26, 1980