

15-005-01346-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

WELL PLUGGING RECORD

Graham County, Sec. 8 Twp. 8 Rge. 25 (E) (W)

Location as "NE/CNW%SW%" or footage from lines SE NE NW

Lease Owner Amerada Petroleum Corporation

Lease Name H. E. Madderl Well No. # 2

Office Address P. O. Box 197 Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed 10-14 1957

Application for plugging filed yes 5-3- 1961

Application for plugging approved yes 5-4 1961


Plugging commenced 5-13-61 1961

Plugging completed 5-18-61 1961

Reason for abandonment of well or producing formation Dry Unprofitable to Operate

If a producing well is abandoned, date of last production 2-5 1959

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

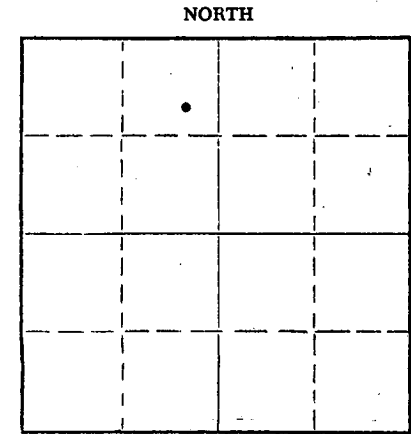

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well A. D. Fabricius 4009

Producing formation Lansing Depth to top 3788' Bottom 4001' Total Depth of Well 3962' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	4007'	2,191'
				8-5/8"	1403'	None
RECEIVED STATE CORPORATION COMMISSION JUN 2 1961 6-2-61 CONSERVATION DIVISION Wichita, Kansas						

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugging commenced 5-13-61. Plugging completed 5-18-61.

Measured in to total depth: 3,962'. DOD

Plugged off bottom: Sanded back to 3930' and dumped 5 sacks of cement.

Worked and shot casing. Loaded hole with water. Worked and shot 5 1/2" casing free @ 2,191'. Built rack and slide. Pulled and layed down casing.

Plugged well: Mudded hole up to 400' and set 10' rock bridge @ 400'. Dumped 25 sacks of cement. Mudded up to 40' and set 10' rock bridge at 40'. Capped the well with 10 sacks of cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling, Inc.
Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss. J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes
Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of May, 19 61

My commission expires December 8th, 1963

Kayann Jenkins
Notary Public.



DRILLERS' LOG

Company: Amerada Petroleum Corporation

SE 1E 1W

Farm Name: H. E. Madden Well No. 2

Sec. 8, Twp. 2S, Rge. 25W,

Total Depth: 4009'

County: Graham,
Kansas

Comm: 9/28/57 Comp: 10/10/57

Elevation:

Contractor: Glenn W. Peel

Production:

Casing: 8 5/8" @ 1390' cem.
5 1/2" @ 4007' cem.

Figures below indicate bottoms of formations:

Surface clay	0 -	100
Shale and shells		710
Shale		930
Shale and shells		1390
Shale		1770
Shale and shells		2050
Lime		2085
Lime and shale		2490
Lime		2840
Shale and lime		2970
Lime		3095
Lime and shale		3195
Lime		3715
Shale and lime		3750
Lime		4009
Total Depth		4009

RECEIVED
STATE CORPORATION COMMISSION
9-6-62
SEP 6 1962
CONSERVATION DIVISION
Topeka, Kansas

This is to certify that the above information is to the best of our knowledge, true and correct.

GLENN W. PEEL

BY: Al. H. Smith

SUBSCRIBED AND SWORN to before me this 11th day of October, 1957

My commission expires: April 27, 1960

Rich Brack
Notary Public

