


15-065-02250-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

NORTH

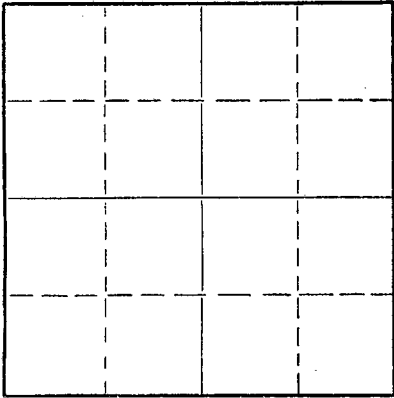

Locate well correctly on above
Section Plat

Graham County. Sec. 8 Twp. 8 Rge. 25 (E) W (W)
Location as "NE/CNW&SWK" or footage from lines Nw/4 Se/4 Se/4
Lease Owner Harry Gore
Lease Name Harry Gore-Madden & Davis Well No. C-3
Office Address Wichita, Kansas.
Character of Well (completed as Oil, Gas or Dry Hole) Dry
Date well completed 8-5-54 19
Application for plugging filed 8-22-54 19
Application for plugging approved 8-23-54 19
Plugging commenced August 24 19 54
Plugging completed September 2 19 54
Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes.

Name of Conservation Agent who supervised plugging of this well Red Horner
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3890 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	161	Cemented

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to surface feet for each plug set.

A Lane Wells Bridging plug had been set at 3766; Hole filled with sand from 3766 to 3740; Five sacks of cement placed in hole with dump bailer from 3740 to 3700; hole filled with mud from 3700 to 175 feet; ten foot rock bridge installed between 175 and 165 ft; Twenty sacks of cement poured in hold and hole mudded to 35 feet; five foot rock bridge installed between 35 feet and 30 ft; hole capped with ten sacks of cement to top of surface pipe.

RECEIVED
STATE CORPORATION COMMISSION

SEP 16 1954

CONSERVATION DIVISION
Wichita, Kansas


Name of Plugging Contractor Barnes & Sons Pipe Pulling Co 9-16-54
Address Russell, Kansas.

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Ralph Gore (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Ralph Gore
400 Brown Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 15th day of September, 19 54

My commission expires June 7, 1956
Charlotte Kitchka
Notary Public.



15-065-02250-00-00

LOG

COMPANY: HARRY GORE
 CONTRACTOR: EMPIRE DRILLING COMPANY
 FARM: MADDEN-DAVIS "C" #3
 LOCATION: NW SE SE, SEC. 8-8-25
 GRAHAM COUNTY, KANSAS
 COMMENCED: 7-27-54
 COMPLETED: 8-5-54

0	TO	190	SURFACE HOLE
190	TO	840	SHALE
840	TO	1485	SHALE AND SAND
1485	TO	1720	SHALE AND SHELLS
1720	TO	2120	SHALE
2120	TO	2124	SHALE AND SHELLS
2124	TO	2160	ANHYDRITE
2160	TO	2530	SHALE AND SHELLS
2530	TO	2645	SHALE
2645	TO	2885	SHALE AND LIME
2885	TO	3005	SHALE
3005	TO	3095	LIME
3095	TO	3190	LIME AND SHALE
3190	TO	3395	SHALE AND LIME
3395	TO	3645	LIME AND SHALE
3645	TO	3890	LIME
3890			R.T.D.

SET 161' OF 8-5/8" SURFACE CASING, CEMENTED WITH 110 SACKS OF CEMENT.

ELEVATION: 2433 D.F.
2436 K.B.


ALL TOPS TAKEN FROM KELLY BUSHING

TOPS: HEEBNER 3680'; TORONTO 3701'; L.S. K.C. 3716'; R.T.D. 3890'.

SET 3883' - 5 1/2" CASING, CEMENTED WITH 125 SACKS OF CEMENT.

C E R T I F I C A T I O N

I, DAN J. KORNFELD, DO HEREBY CERTIFY THAT THE ABOVE AND FOREGOING IS A TRUE AND CORRECT COPY OF THE LOG ON THE MADDEN-DAVIS "C" #3, NW SE SE, SECTION 8, TOWN# SHIP 8, RANGE 25 WEST, GRAHAM COUNTY, KANSAS AS REFLECTED BY THE FILES OF THE EMPIRE DRILLING COMPANY.



Dan J. Kornfeld
DAN J. KORNFELD

SUBSCRIBED AND SWORN TO BEFORE ME A NOTARY PUBLIC WITHIN AND FOR SEDGWICK COUNTY, KANSAS THIS 16TH DAY OF AUGUST 1954

MY COMMISSION EXPIRES 5-5-56

Mary Heinmiller
NOTARY PUBLIC

PLUGGING
 FILE SEC 8 T 6 R 25N
 BOOK PAGE 57 LINE 36

8-21-54
 RECEIVED
 AUG 21 1954