


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

Graham County, Sec. 31 Twp. 8 Rge. 24 (E) (W) x  
Location as "NE/CNW%SW%" or footage from lines NW SW NE  
Lease Owner Petroleum Management Inc.  
Lease Name Holly Unit #7 Well No. #4  
Office Address Box 922, Great Bend, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed 4-26-71 19\_\_\_\_  
Application for plugging approved \_\_\_\_\_ 19\_\_\_\_  
Plugging commenced 5-3-71 19\_\_\_\_  
Plugging completed 5-15-71 19\_\_\_\_  
Reason for abandonment of well or producing formation \_\_\_\_\_

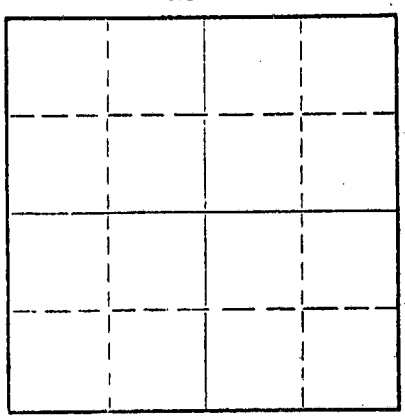

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? \_\_\_\_\_

Name of Conservation Agent who supervised plugging of this well W. L. Nichols  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3985' Feet  
Show depth and thickness of all water, oil and gas formations. !

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	3984'	1032.41'
				8 5/8"	313'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Pushed plug to 3750', sanded back to 3725'. Mixed and ran 5 sacks cement thru dump  
bailer.  
Squeezed hole with 5 sacks hulls - 12 sacks gel. 100 sacks cement from 1175' to 850'  
13 sacks gel from 850' to 330'. Released plug and 25 sacks cement from 330' to 250'  
5 sacks gel from 250' to 50'. 15 sacks cement from 50' to base of cellar.


RECEIVED  
STATE CORPORATION COMMISSION  
MAY 18 1971  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Southwest Casing Pulling Co.  
Address Box 364, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.  
Box 364, Great Bend, Kansas  
(Address)

Subscribed and sworn to before me this 17 day of May, 19 71  
Sidney D. Miller  
Notary Public.  
My commission expires 24 October 1972



DRILLER'S LOG

COMPANY:  
CONTRACTOR:  
FARM:

Texaco, Inc.  
LEBEN DRILLING, INC.  
HOLLEY UNIT TR. 7-#4  
NW SW NE Sec. 31-8S-24W  
GRAHAM COUNTY, KANSAS  
4-16-66  
4-21-66

COMMENCED:  
COMPLETED:

0  
40  
90  
940  
1135  
1590  
168  
168  
253  
659  
919  
3750  
3910  
3944  
3985

Clay, Sand, Post Rock  
Sand  
Shale  
Sand, Shale  
Shale, Sand  
Redbed  
Anhydrite  
Shale  
Shale, Shells  
Shale, Lime  
Lime, Shale  
Lime  
Core  
Lime  
NTE - Set 5 1/2" Casing

RECEIVED  
STATE CORPORATION COMMISSION  
APR 27 1971  
CONSERVATION DIVISION  
Wichita, Kansas

Set 8 5/8" 8 rd. pipe used surface casing 313' with 715 sacks  
Posmix, 1% cc

I, Leslie Kite, do hereby certify that the above and foregoing is a true and correct copy of the log of the Holley Unit Tr. 7-#4, located NW SW NE Section 31, Township 8 South, Range 4 West, of Graham County, Kansas, as reflected by the records of Leben Drilling, Inc.

*Leslie Kite*

Leslie Kite

STATE OF KANSAS )  
                          ) SS  
COUNTY OF BARTON)

Subscribed and sworn to and before me, a Notary Public, in and for Barton County, Kansas, this 6th day of April, 1966.

*Ulanda Nichols*

Ulanda Nichols

My Commission Expires  
April 1, 1967