

15-065-00646-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

Graham County, Sec. 20 Twp. 8 Rge. 25 (E) W (W)

Location as "NE/CNW/SW" or footage from lines SE SE SE

Lease Owner Harms-Burt Drilling Co.

Lease Name Schmied Well No. 1

Office Address P.O. Box 184, Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed July 31, 1960 19 60

Application for plugging filed July 31 19 60

Application for plugging approved July 31 (verbally) 19 60


Plugging commenced July 31 19 60

Plugging completed July 31 19 60

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

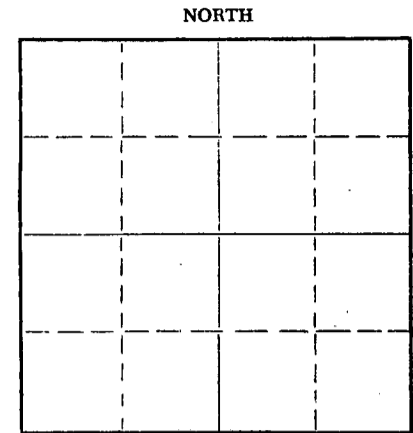

Name of Conservation Agent who supervised plugging of this well A.D. Fabricius

Producing formation Depth to top Bottom Total Depth of Well 3925 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface		0	205'	8-5/8"	205'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole from total depth to 200' with heavy mud with a plug and 1/2 sack of hulls, and 25 sacks of cement at this point. Heavy mud to 35 ft. with plug and 10 sacks of cement at this point.

RECEIVED
STATE CORPORATION COMMISSION

AUG 9 1960

CONSERVATION DIVISION
Wichita, Kansas

8-9-60

Name of Plugging Contractor Harms-Burt Drilling Co.
Address P.O. Box 184, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
ALLAN HARMS (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) Allan Harms
P.O. Box 184, Great Bend, Kansas

(Address)

SUBSCRIBED AND SWORN to before me this 6 day of August, 1960

My commission expires 1-20-62

Mary E. Van Pelt
Notary Public.



D R I L L E R S L O G

Company: Harms-Burt Drilling Co.
 Farm: Schmied #1
 Commenced: July 22, 1960
 Elevation: 2393 KB

SE SE SE Section 20-8-25W
 Graham County, Kansas
 Completed: July 31, 1960

0-60 sand
 60-170 shale & sand
 170-400 shale
 400-620 shale & sand
 620-1050 shale Blue & gray
 1050-1500 shale & sand streaks
 1500-1630 shale
 1630-1925 red bed & sand
 1925-2106 red bed, shale & shells
 2106-2145 anhydrite
 2145-2540 shale & shells
 2540-2750 shale
 2750-3715 lime & shale
 3715-3917 lime
 3917-3925 shale
 3925 Total depth

RECEIVED
 STATE CORPORATION COMMISSION

AUG 9 1960

CONSERVATION DIVISION
 Wichita, Kansas

8-9-60

Set 205 ft. of 8-5/8" surface pipe. Cemented with 1750 sacks of common cement with 2% calcium chloride.

Tops: Anhydrite - 2106
 Hubner - 3652
 Toronto -- 3676
 Lansing - 3692
 Base K.C - 3909

Drill Stem Tests #1 - 3710-3730 open 1 hr. Shut in 20 minutes. Recovered 25' slightly gas cut mud with few spots of oil.
 1 BAP-1215 #FBAP-1070 #

#2 - 3806-3830 Open 30 minutes. Shut in 20 minutes.
 Recovered 5' mud. 1BHP-820 #FBHP-560#

#3 - 3844-3870 Open 45 minutes. Shut in 20 minutes.
 Recovered 5' mud 1BHP-70# FBHP-25 #

Ran electric log.

Dry, plugged and abandoned.

A F F I D A V I T

STATE OF KANSAS)
)SS.
 COUNTY OF BARTON)

I, Allan Harms of the Harms-Burt Drilling Company being first duly sworn on oath state: I have knowledge of the facts, statements and matters herein contained and the same are true and correct.

Subscribed and sworn to before me this 6 day of July, 1960.

Allan Harms
 AUG.
Mary E. Van Pelt
 Notary Public

My commission expires January 20, 1962.