

15-065-21437-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Graham County, Sec. 11 Twp. 9 Rge. 21 N/W


Location as "NE/CNW/SW" or footage from lines
SE SW NW

Lease Owner J. B Collins

Lease Name Newell Well No. 1

Office Address 1007 Cody Ave. Suite, Hays, KS 67601

Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole

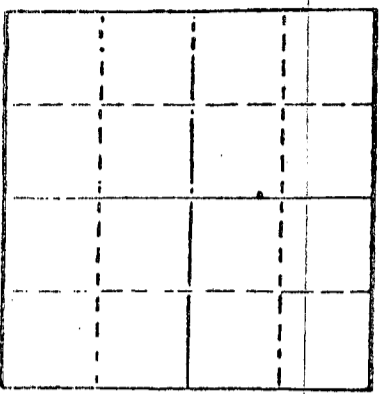

Locate well correctly on above
Section Plot

Date Well completed 6-6 19 81

Application for plugging filed 6-6 19 81

Application for plugging approved 6-6 19 81

Plugging commenced 6-6 19 81

Plugging completed 6-6 19 81

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor

Producing formation Depth to top Bottom Total Depth of Well 3825

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	207'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from feet to
feet for each plug set.

- 1st plug was set @ 980' with 70 sacks cement
- 2nd plug was set @ 200' with 30 sacks cement
- 3rd plug was set @ 40' with 10 sacks cement

(If additional description is necessary, use BACK of this form)

Name of Plugging Contractor Dreiling Oil, Inc. Victoria, KS 67671

RECEIVED
STATE CORPORATION COMMISSION
AUG 5 1981 8-5-81

STATE OF KANSAS COUNTY OF ELLIS


I, Joseph A. Hess, Sec.-Treas. of Drlg. Contr. (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) Joseph A. Hess
Joseph A. Hess, Hays, KS 67601
(Address)

SUBSCRIBED AND SWORN TO before me this 10th day of June, 19 81

My commission expires August 30, 1982

Patty Dreiling
Patty Dreiling Notary Public:



DREILING OIL, INC.

Victoria, Kansas 67671

15-065-21437-00-00

WELL LOG

J. B. Collins
 1007 Cody Ave. Suite A
 Company Hays, KS 67601
 Farm Newell No. 1
 Total Depth 3825'
 Comm. 6-1-81 Comp. 6-6-81
 Contractor Dreiling Oil, Inc.
 Rt. #1
 Victoria, KS 67671

Sec. 11 Twp. 9 Rng. 21W
 Location SE SW NW
 County Graham
 Elevation: 2268' K. B.
 2265' D. F.
 2263' G. R.

Casing Record
 207' - 8 5/8"

Cement Record
 160 sacks cement

Production:
 D & A

Figures Indicate Bottom of Formations

0'	55'	Top Soil
55'	95'	Sand & Rock
95'	212'	Shale
212'	870'	Shale & Sand
870'	1220'	Shale
1220'	1460'	Sand
1460'	1705'	Red Bed & Shale
1705'	1734'	Red Bed & Shale
1734'	1770'	Anhy.
1770'	2230'	Shale
2230'	2444'	Shale & Lime
2444'	2745'	Shale & Lime
2745'	3053'	Shale & lime
3053'	3282'	Shale & Lime
3282'	3430'	Lime & Shale
3430'	3558'	Lime
3558'	3662'	Lime
3662'	3753'	Lime
3753'	3800'	Lime
3800'	3825'	Lime
3825'	T.D.	

STATE OF KANSAS)
)ss
 COUNTY OF ELLIS)

I, Joseph A. Hess, Secretary Treasurer of Dreiling Oil, Inc. upon oath states that the above and foregoing is a true and correct copy from the Daily Drilling Report from the Newell #1.

RECEIVED
 STATE CORPORATION COMMISSION
 AUG 5 1981
 CONSERVATION DIVISION
 Wichita, Kansas

Joseph A. Hess
 Joseph A. Hess

Subscribed and sworn to before me this 10th day of June, 1981.

Patty Dreiling
 Patty Dreiling, Notary Public

My commission expires: August 30, 1982.

