

15-065-00383-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

Graham County, Sec. 24 Twp. 9 Rge. (E) 21 (W)

Location as "NE/CNW/SW" or footage from lines. NW 1/4 NW 1/4 SE 1/4

Lease Owner Barnett Oil Company

Lease Name Cochran Well No. 1

Office Address 417 First Nat'l Bank Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed July 3, 1953

Application for plugging filed July 3, 1953

Application for plugging approved July 3, 1953


Plugging commenced July 3, 1953

Plugging completed July 3, 1953

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production - - 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

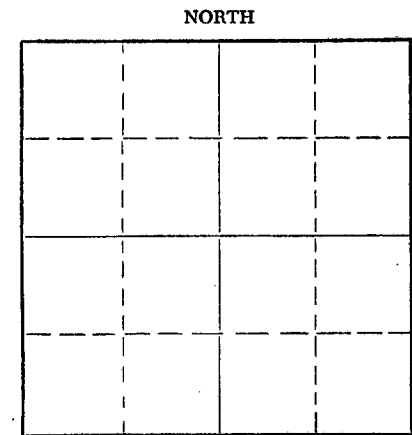

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3791 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Pipe		0	160'	8 5/8"	160'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud from 3791 feet to 155 feet.
Set wooden plug at 155 feet and filled surface casing with 1/2 sack of hulls and 15 sacks of cement to 108 feet. Filled surface casing with heavy mud from 108 feet to 40 feet. Set wooden plug at 40 feet and filled casing with 10 sacks of cement to bottom of cellar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Barnett Drilling, Inc.

Address 623 First Nat'l Bank Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss. W. R. Hunter

(employee of owner) or (owner operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. R. Hunter


417 First Nat'l Bank Bldg., Wichita, Kansas

(Address)

SUBSCRIBED AND SWORN to before me this 22nd day of July, 1953

My commission expires February 27, 1956.

24-2675-S 2-52-20M



PLUGGING
FILE SEC 24 T 9 R 210
BOOK PAGE 112 LINE 35

Michael F. Willis
Notary Public.
STATE CORPORATION COMMISSION.
JUL 23 1953 7-23-53
CONSERVATION DIVISION
Wichita, Kansas

15-065-00383-00-00

BARNETT OIL COMPANY, ET AL
LOG OF COCHRAN WELL NO. 1
NW¹/₄ NW¹/₄ SE¹/₄ SECTION 24-9S-21W
GRAHAM COUNTY, KANSAS

DATE COMMENCED: June 20, 1953

DATE COMPLETED: July 3, 1953

<u>Formation</u>	<u>From</u>	<u>To</u>	<u>Remarks</u>
Clay	0	10	
Sand	10	20	
Sandy Shale	20	55	
Sand	55	75	
Shale	75	600	Set 8 5/8" Surface Pipe at 160'; cemented with 125 sacks of cement.
Shale	600	1090	
Sandy Shale	1090	1260	
Sand	1260	1425	
Shale and Shells	1425	1545	
Shale	1545	1720	
Anhydrite	1720	1761	
Shale and Shells	1761	2100	
Shale	2100	2160	
Lime and Shale	2160	2450	
Lime	2450	2685	
Lime and Shale	2685	2905	
Lime	2905	3025	
Lime and Shale	3025	3250	
Lime	3250	3310	
Lime and Shale	3310	3500	
Lime	3500	3695	
Lime and Shale	3695	3725	
Lime	3725	3765	
Lime and Shale	3765	3783	
Lime	3783	3791	
Total Depth		3791	Dry and Abandoned.

PLUGGING
 FILE SEC 24 T 9 R 216
 BOOK PAGE 112 LINE 35

RECEIVED
 STATE CORPORATION COMMISSION
 JUL 23 1953 7-23-53
 CONSERVATION DIVISION
 Wichita, Kansas