

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Sheridan County, Sec. 26 Twp. 8S Rge. 27 (E) W (W)

Location as "NE/CNW/SW" or footage from lines SW/4 NE/4 NW/4

Lease Owner C-G Drilling Co.

Lease Name Brown Well No. 1

Office Address 107 Rule Building, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed September 18 1965


Application for plugging filed do 19

Application for plugging approved do 19

Plugging commenced do 19

Plugging completed do 19

Reason for abandonment of well or producing formation Too low structurally

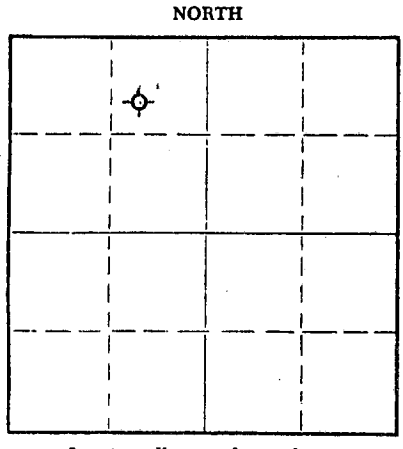

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well M L Nichols

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-758"	279'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

FILLED HOLE WITH HEAVY MUD TO 550'. SET PLUG WITH 20 SACKS CEMENT.
FILLED HOLE WITH HEAVY MUD TO 270'. SET PLUG WITH 1/2 SACK HULLS
AND 20 SACKS CEMENT. SET PLUG AND FILLED HOLE TO TOP WITH 1/2 SACK
HULLS & 10 SACKS CEMENT. (AT 40')

RECEIVED
STATE CORPORATION COMMISSION

SEP 27 1965

CONSERVATION DIVISION
Wichita, Kansas

927-65


Name of Plugging Contractor C-G DRILLING CO.
Address 107 RULE BUILDING, WICHITA, KANSAS

STATE OF KANSAS, COUNTY OF SEDGWICK, ss. G F GALLOWAY

(employee or owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) G F Galloway
107 RULE BLDG., WICHITA, KANSAS (Address)

Subscribed and sworn to before me this 20th day of September, 1965



Vicky Jacobs
Notary Public.

15-179-30061-00-00

WELL LOG

OPERATOR: C-G DRILLING CO.

WELL NAME: BROWN #1 LOCATION: SW/4 NE/4 NW/4 Sec. 26-8-27W

COUNTY: SHERIDAN STATE: KANSAS

WELL COMMENCED: 9/9/65 WELL COMPLETED: 9/18/65

ELEVATION: 2610 K.B. TOTAL DEPTH: 4000'

PRODUCTION: Dry & abandoned RIG NO: 1

CASING - 8-5/8": SET @279' (8 jts.) 20# with 165 sacks Quikset

5-1/2": _____

All Measurements taken from the top of rotary bushing,

FROM	TO	FORMATION	DEVIATION FROM VERTICAL	REMARKS:
0	279	Sand-Shale		
279	670	Shale	500' - 3/4°	
670	1340	Shale-Sand		
1340	2090	Sand-Shale	1500' - 1/4°	
2090	2160	Shale-Red Bed		
2160	2242	Shale		
2242	2283	Anhydrite		
2283	2385	Shale		1.DST 3851-60
2385	2555	Shale-Lime	2500' - 1/4°	2.DST 3893-3910
2555	3160	Shale-Lime	3000' - 1/2°	3.DST 3931-50
3160	4000	Lime		4.DST 3954-75

RECEIVED
 STATE CORPORATION COMMISSION
 SEP 27 1965
 927-65
 CONSERVATION DIVISION
 Wichita, Kansas

STATE OF KANSAS)
 COUNTY OF SEDGWICK) SS:

The undersigned hereby certifies that to the best of his knowledge and belief, the above facts are true and correct.

C-G DRILLING CO.

By G. F. Galloway
 G. F. Galloway

This 20 day of September, 1965

Vicky Jacobs
 Vicky Jacobs - Notary Public

