


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

15-065-01138-00-00
WELL PLUGGING RECORD

NORTH

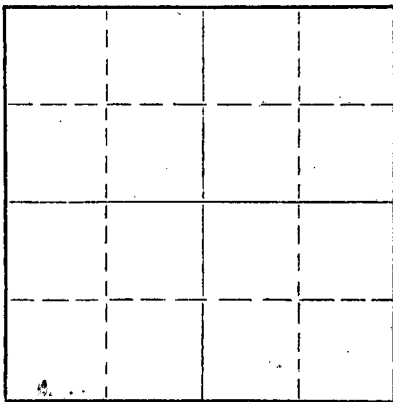

Locate well correctly on above Section Plat

Graham County. Sec. 28 Twp. 9 Rge. 21 (E)W (W)
Location as "NE/CNW&SW¼" or footage from lines SE SW SW
Lease Owner Morgenstern & Spector
Lease Name Dodson #3 Well No. _____
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed 4-24-56 19____
Application for plugging filed January 20, 1960 19____
Application for plugging approved January 21, 1960 19____
Plugging commenced 2-1-60 19____
Plugging completed 2-5-60 19____
Reason for abandonment of well or producing formation failure to produce profitably
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well A.D. Fabricius
Producing formation Arbuckle Depth to top 3875 Bottom 3899 Total Depth of Well 3905 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"		none
				5-1/2"		3403'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked the hole to 3905' and found it open.
Filled w/sand to 3900' and dumped 2 sacks of cement with bailer. Pulled 5 1/2" casing.
Cleared hole and mudded the hole to 220', set rock bridge to 210' and ran 25 sacks of cement. Mudded the hole to 35', set rock bridge to 30' and ran 10 sacks of cement to base of cellar.

PLUGGING COMPLETED

STATE OF KANSAS
FEB 29 1960
CONSERVATION DIVISION
Wichita, Kansas

2-29-60

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Knight Casing Pulling Co.
Address Chase, Kansas

STATE OF KANSAS COUNTY OF RICE ss.
I, Noel J. Knight (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
Chase, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 8th day of February, 1960

My commission expires 9-27-62

Thomas V. Dwyer
Notary Public.



WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY

508 East Murdock,

Wichita, Kansas

15-065-01138-00-00

Company EL DORADO REFINING CO.
Farm Dodson No. 3

SEC. 28 T. 9 R. 2137
SE SW SW

Total Depth. 3905'

Comm. 4-16-56

Comp. 4-24-56


Shot or Treated.

Contractor.

Issued. 6-23-56

County Graham

KANSAS



Elevation. 2345' TP

Production. 3000 BOPD

CASING:

8 5/8" 227' cem w/150 sx
5 1/2" 3899' cem w/75 sx

Figures Indicate Bottom of Formations.

cellar	8
clay & sand	110
shale	200
shale	227
shale & shells	740
sand & shale	1325
sand	1450
red shale - sand	1800
anhydrite	1845
shale & shells	2200
lime & shale	3515
lime	3855
lime & shale	3905
Total Depth	

Tops:	
Hoehner	3526
Toronto	3551
Lanning	3563
Base Kansas City	3788
Conglomerate	3875
Arbuckle	3895

120-60
RECEIVED
STATE CORPORATION

JAN 20 1960
CONSERVATION DIVISION
Wichita, Kansas